


## AT-650 AL-TRACK

## Bristle Filament Carpet Insert



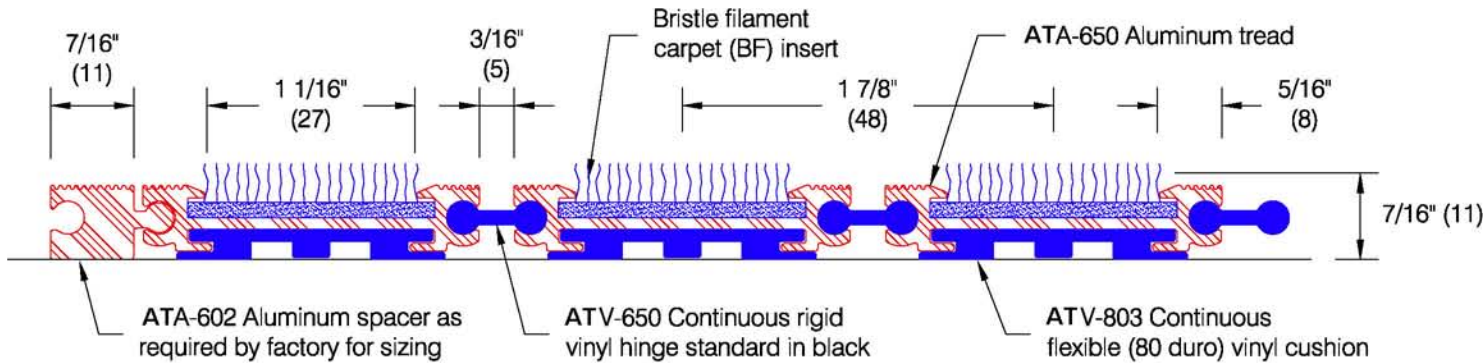


### Features:

- Extruded aluminum treads alloy 6063-T6
- Continuous flexible vinyl cushion for superior noise reduction
- Roll-Up for easy cleaning of recess
- Perforated hinge for added drainage
- Single section width to 144" (3658)
- Solution dyed polypropylene fibers, 27 oz/sqyd with 50% Blend 600/12-Denier multi-filament and 595/D1 monofilament. Fibers are fusion bonded to continuous two-ply rigid backing.
- Fibers are waterproof with UV inhibitors for exterior use
- Static Coefficient of Friction (ASTM D2047) Dry: 0.64, Wet: 0.67

### Optional Framing:


\* Amarco requires that exact opening dimensions be provided. Factory will fabricate mats 1/4" (6) smaller than exact opening dimensions to allow for proper fit.

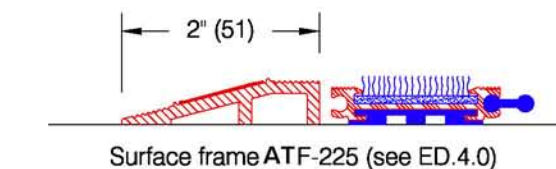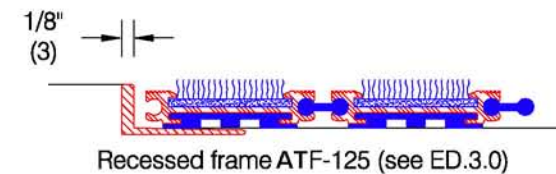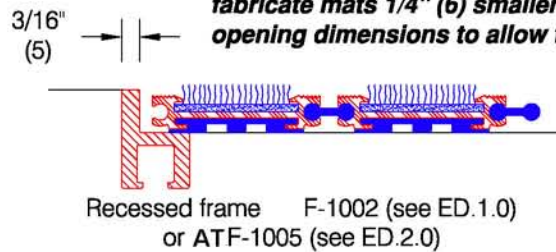

### Hinge Details:




Ball & Socket Hinge

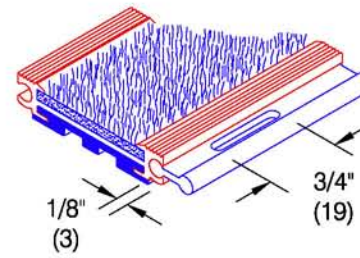


Perforated hinge

### Optional Nosings:



Square vinyl nosing (see ED.20.0)




Beveled vinyl nosing (see ED.21.0)

### Finishes:

- Aluminum tread and spacers: Mill finish (standard) #405, Medium bronze anodized #404, Clear anodized #403, Black anodized #462
- Vinyl cushion and hinge: Black
- Bristle filament carpet insert: Manufacturer's standard colors

### Sectioning information:

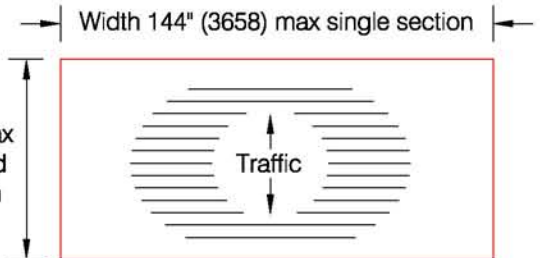

Amarco reserves the right to discontinue a design or modify an existing design without prior notice

\* Mats over 66 square feet may require sectioning as determined by the factory

Customer :

Project :

Architect :

Sales Rep :

ED.13.2c