


AMARCO

American Mat & Rubber Company

ENTRANCE MATS & GRATINGS

AT-650 AL-TRACK *Corrugated Aluminum Insert*

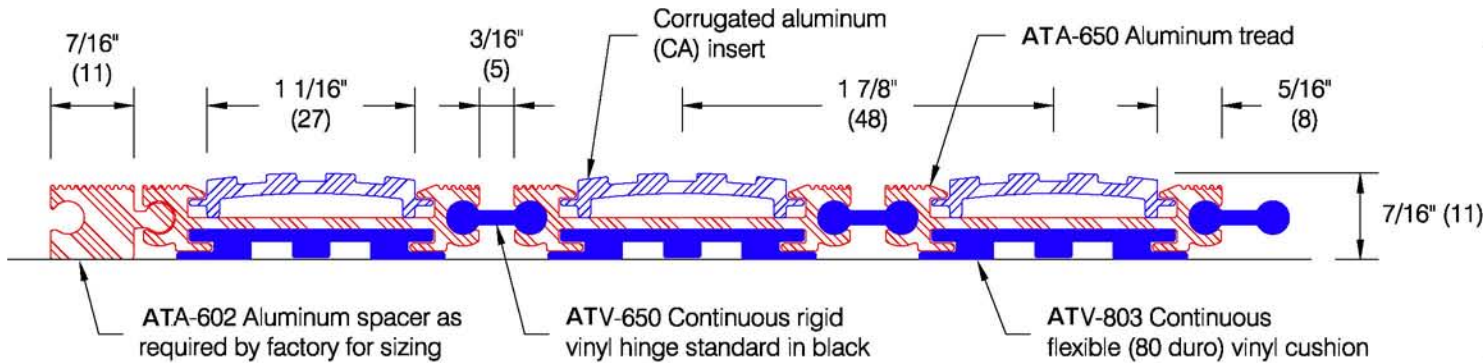

Features:


- Extruded aluminum treads alloy 6063-T6
- Continuous vinyl hinge and cushion for superior noise reduction
- Roll-Up for easy cleaning of recess
- Perforated hinge for added drainage
- Single section width to 144" (3658)
- Static Coefficient of Friction (ASTM D-2047-82)
Dry: 0.61, Wet: 0.92

Finishes:


- Aluminum tread and spacer:
Mill finish (standard) #405
Medium bronze anodized #404
Clear anodized #403
Black anodized #462
- Vinyl cushion and hinge: Black
- Corrugated aluminum insert alloy 6105-T5:
Mill finish (standard) #405

Optional Framing:


*** Amarco requires that exact opening dimensions be provided. Factory will fabricate mats 1/4" (6) smaller than exact opening dimensions to allow for proper fit.**

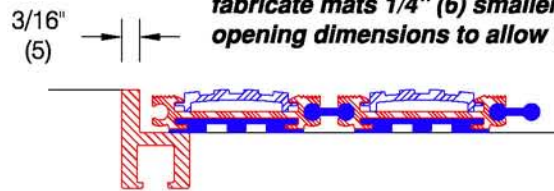

Recessed frame ATF-1002 (see ED.1.0) or MRF-1005 (see ED.2.0)

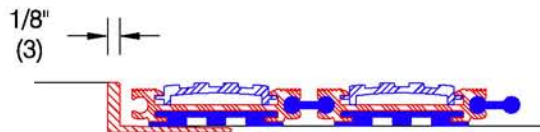


Recessed frame ATF-125 (see ED.3.0)

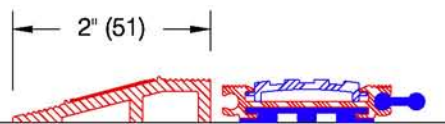


Surface frame ATF-225 (see ED.4.0)

Hinge Details:



Ball & Socket Hinge

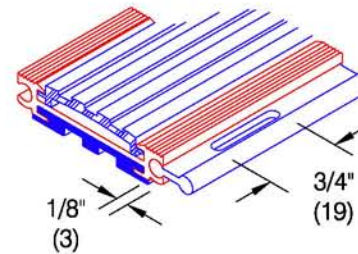

Perforated hinge

Optional Nosings:






Square vinyl nosing (see ED.20.0)



Beveled vinyl nosing (see ED.21.0)

Sectioning information:

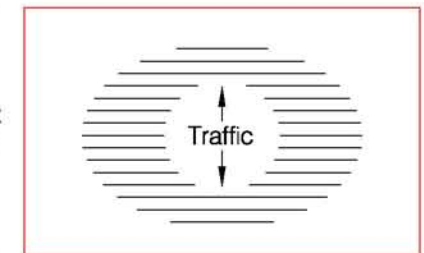

*** Mats over 66 square feet may require sectioning as determined by the factory**

Amarco reserves the right to discontinue a design or modify an existing design without prior notice

Customer :

Project :

Architect :

Sales Rep :

ED.13.4b