


AT-650 AL-TRACK

Nylon Carpet Insert

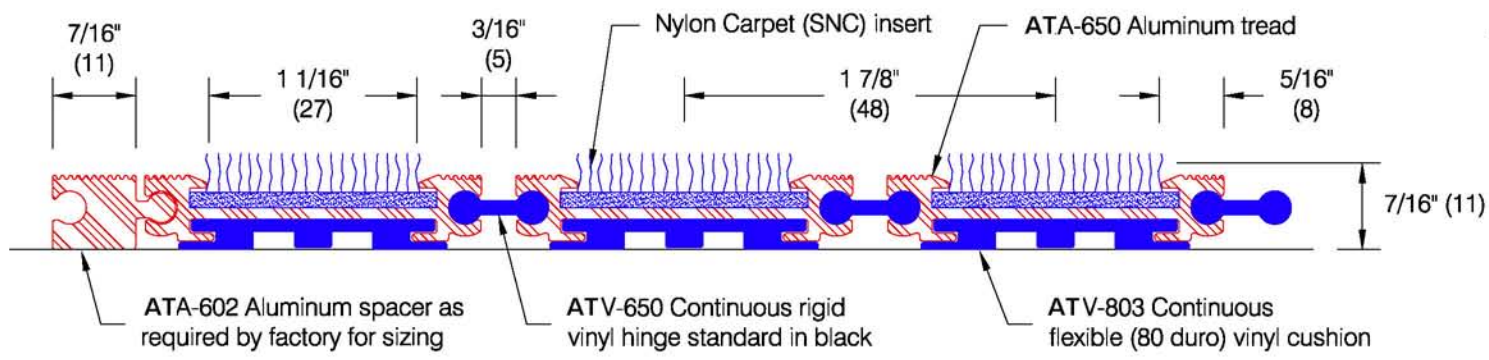


Features:


- Extruded aluminum treads alloy 6063-T6
- Continuous vinyl hinge and cushion for superior noise reduction
- Roll-Up for easy cleaning of recess
- Perforated hinge for added drainage
- Single section width to 144" (3658)
- 100% solution dyed nylon fiber with 1/4" (6) finish pile height, 33.8 oz/sq yd in rigid backing
- Static Coefficient of Friction (ASTM D-2047-82) Dry: 0.48, Wet: 0.67

Optional Framing:


*** Amarco requires that exact opening dimensions be provided. Factory will fabricate mats 1/4" (6) smaller than exact opening dimensions to allow for proper fit.**

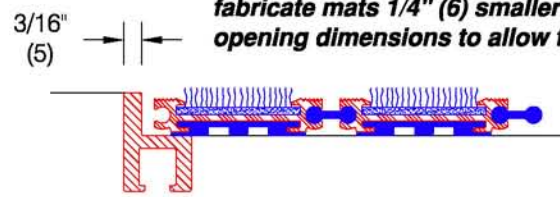

Recessed frame ATF-1002 (see ED.1.0) or ATF-1005 (see ED.2.0)


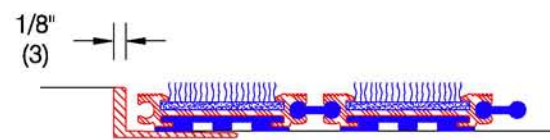


Recessed frame ATF-125 (see ED.3.0)


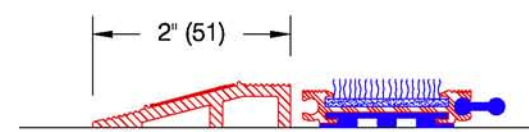


Surface frame ATF-225 (see ED.4.0)

Hinge Details:

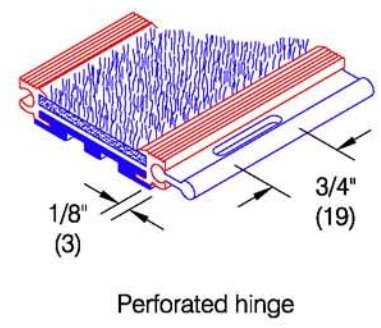


Optional Nosings:



Finishes:

- Aluminum tread and spacer: Mill finish (standard) #405, Medium bronze anodized #404, Clear anodized #403, Black anodized #462
- Vinyl cushion and hinge: Black
- Rigid-Back Nylon carpet insert: Manufacturer's standard colors

Sectioning information:

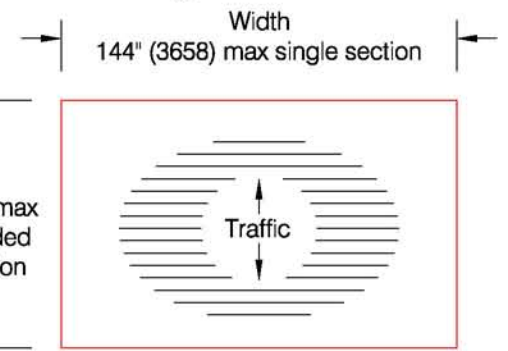

*** Mats over 66 square feet may require sectioning as determined by the factory**

Amarco reserves the right to discontinue a design or modify an existing design without prior notice

Customer :	Project :	ED.13.1c
Architect :	Sales Rep :	