


AT-800 AL-TRACK

Aluminum Abrasive Insert

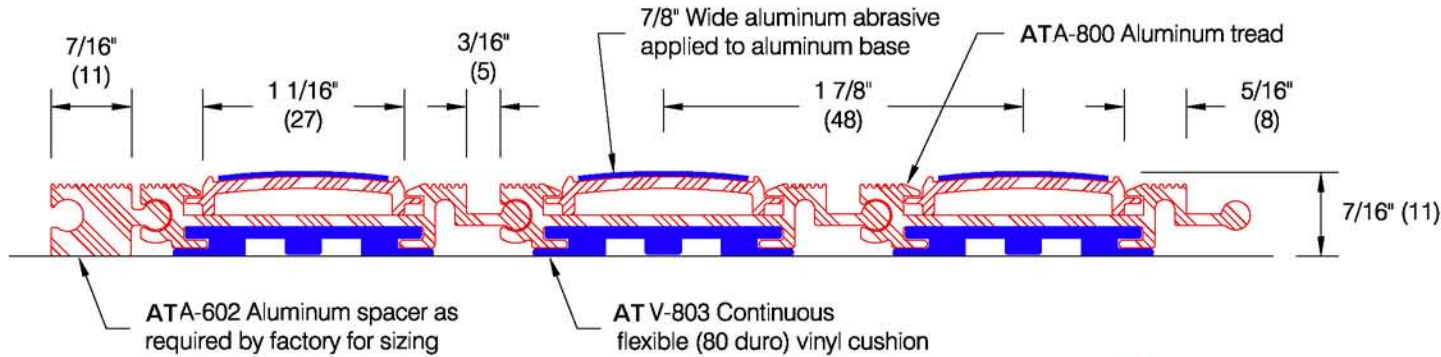


Features:

- Extruded aluminum treads alloy 6063-T52
- Continuous vinyl cushion for superior noise reduction
- Roll-Up for easy cleaning of recess
- Optional perforated hinge for added drainage
- Single section width to 144" (3658)
- Aluminum abrasive insert: Extruded aluminum base with applied abrasive strip
- Static Coefficient of Friction (ASTM D-2047-82)
Dry: > 1.14, Wet: > 1.20

Finishes:

- Aluminum tread and spacer:
Mill finish (standard) #405
Medium bronze anodized #404
Clear anodized #403
Black anodized #462
- Vinyl cushion: Black
- Insert base: Mill finish aluminum #405
- Insert: Mill finish aluminum #405, w/ an applied manufacturer's standard color abrasive strip


Sectioning information:

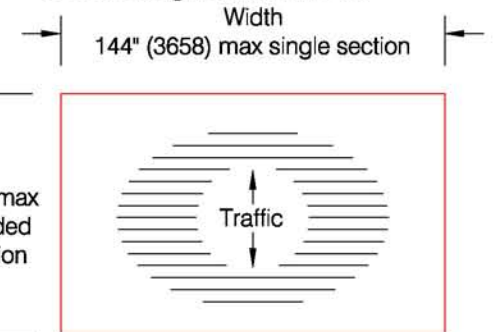


* Mats over 66 square feet may require sectioning as determined by the factory

Optional Framing:


* Amarco requires that exact opening dimensions be provided. Factory will fabricate mats 1/4" (6) smaller than exact opening dimensions to allow for proper fit.

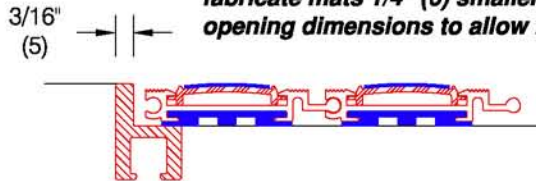

Recessed frame ATF-1002 (see ED.1.0) or MRF-1005 (see ED.2.0)

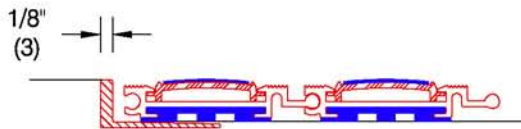

Recessed frame ATF-125 (see ED.3.0)




Surface frame ATF-225 (see ED.4.0)

Hinge Details:



Ball & Socket Hinge

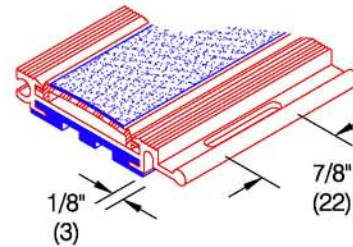

Optional perforated hinge (solid hinge standard)

Optional Nosings:



Square vinyl nosing (see ED.20.0)



Beveled vinyl nosing (see ED.21.0)

Amarco reserves the right to discontinue a design or modify an existing design without prior notice

Customer :	Project :	ED.18.0c
Architect :	Sales Rep :	