


AT-250 - 3/4" Aluminum Roll-Up Grating w/ Aluminum Abrasive Insert

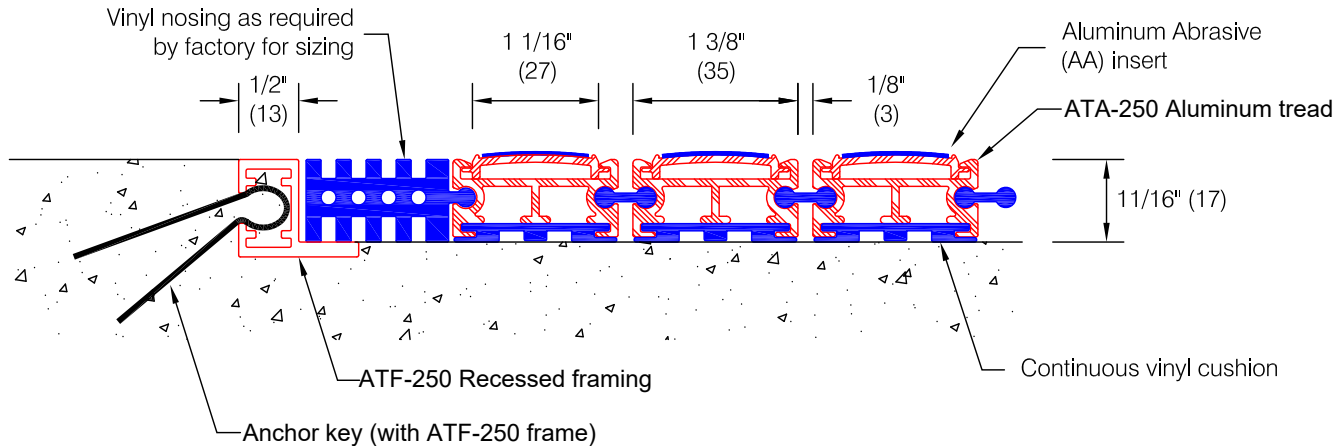

Features:

- Extruded aluminum treads alloy 6105-T5
- Continuous vinyl cushion for superior noise reduction
- 3/4" (19) deep for increased drainage ability
- Perforated hinge for added drainage
- Single section width to 144" (3568)
- Aluminum abrasive insert: Extruded aluminum base with applied abrasive strip
- Static Coefficient of Friction (ASTM D-2047-82)
Dry: > 1.14, Wet: > 1.20

Finishes:

- Aluminum tread:
 - Mill finish (standard) #405
 - Medium bronze anodized #404
 - Clear anodized #403
 - Black anodized #462
- Aluminum abrasive insert alloy 6105-T5:
 - Mill finish aluminum base (standard) #405
 - Abrasive from manufacturer's color samples



Optional Framing:

* Amarco Products requires that exact opening dimensions be provided. Factory will fabricate mats 1/4" (6) smaller than exact opening dimensions to allow for proper fit on dimensions without nosing.


Hinge Detail:



Ball & Socket Hinge

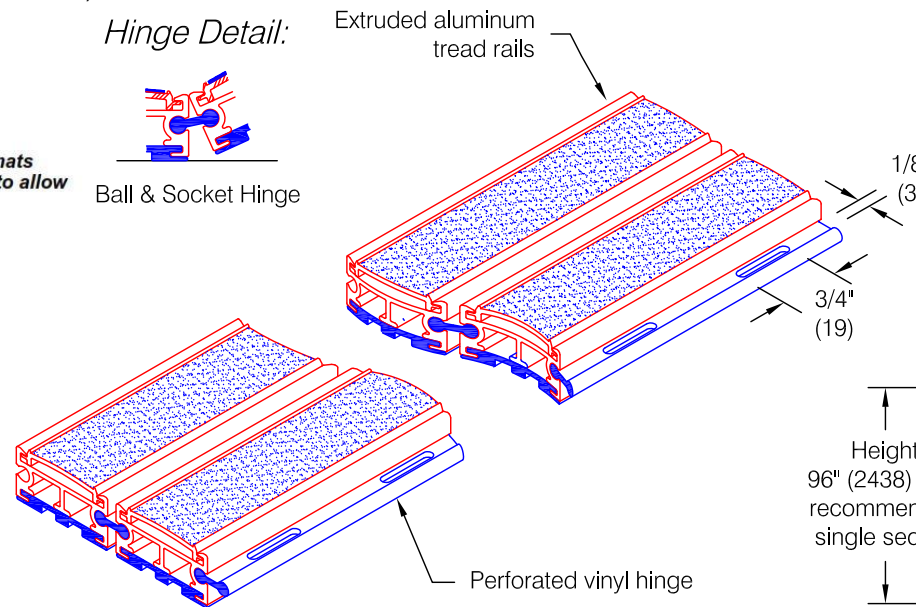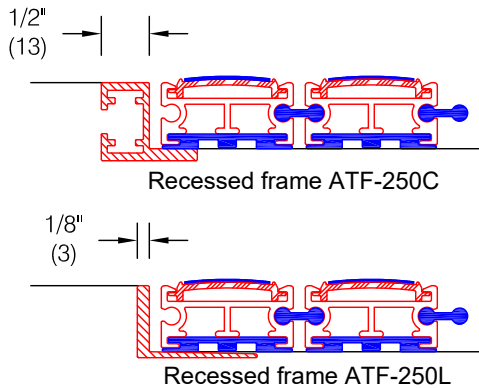

Sectioning information:

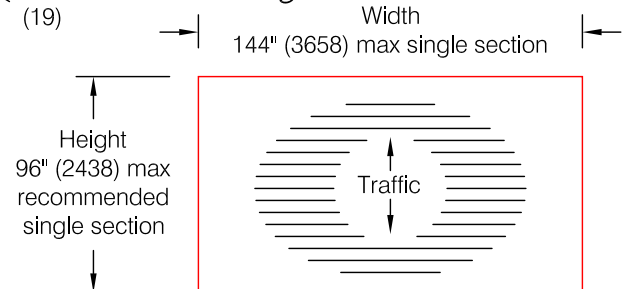


* Mats over 48 square feet may require sectioning as determined by the factory

Amarco Products reserves the right to discontinue a design or modify an existing design without prior notice

Customer :	Project :	
Architect :	Sales Rep :	

AT-250 - 3/4" Aluminum Roll-Up Grating w/ Nylon Carpet Insert

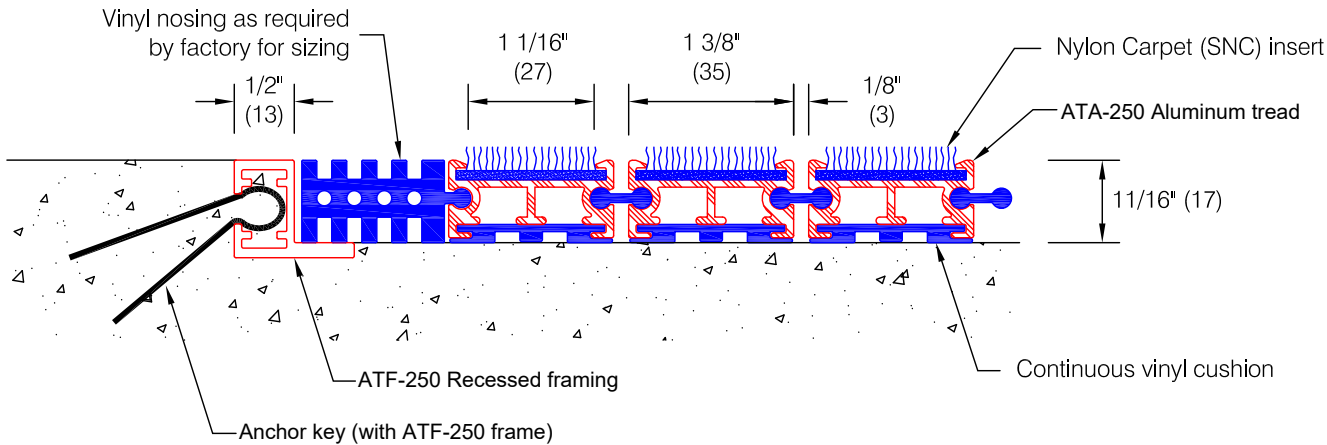

Features:

- Extruded aluminum treads alloy 6105-T5
- Continuous vinyl cushion for superior noise reduction
- 11/16" (17) deep for increased drainage ability
- Roll-Up for easy cleaning of recess
- Perforated hinge for added drainage
- Single section width to 144" (3568)
- 100% solution dyed nylon fiber with 1/4" (6) finish pile height, 33.8 oz/sq yd in rigid backing
- Static Coefficient of Friction (ASTM D-2047-82)
Dry: 0.48, Wet: 0.67


Finishes:

- Aluminum tread:
 - Mill finish (standard) #405
 - Medium bronze anodized #404
 - Clear anodized #403
 - Black anodized #462
- Rigid-Back Nylon carpet insert:
 - Select from manufacturer's color samples


Optional Framing:

Note On Dimensions:


Amarco Products requires that exact opening dimensions be provided. Factory will fabricate mats 1/4" (6) smaller than exact opening dimensions to allow for proper fit on dimensions without nosing.

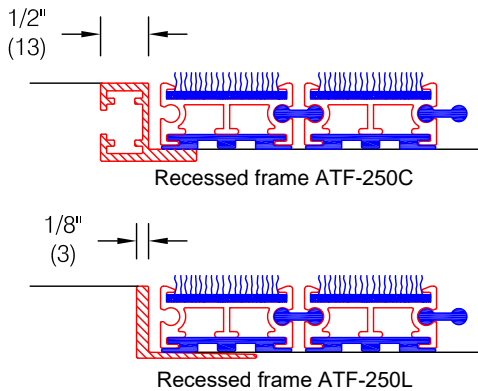

Hinge Detail:

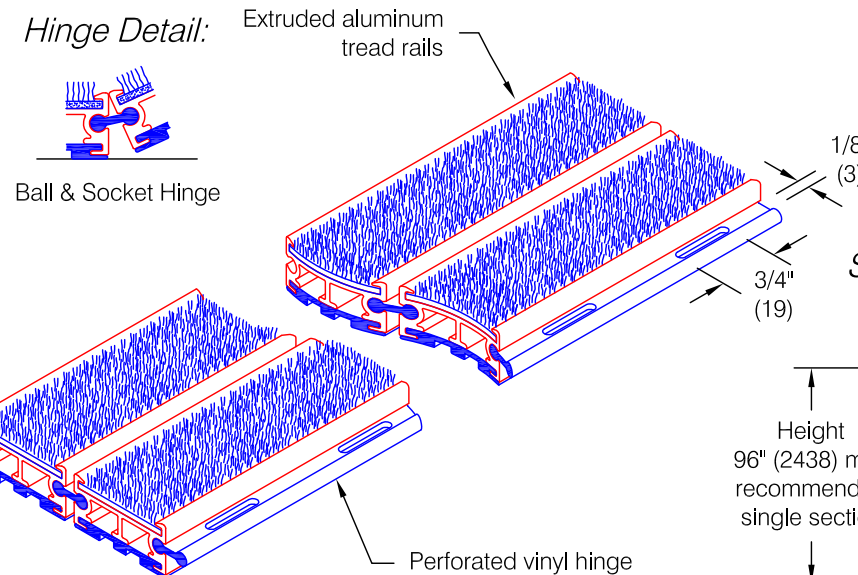

Sectioning information:

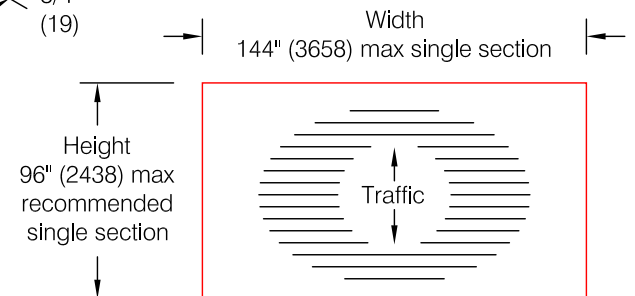


* Mats over 48 square feet may require sectioning as determined by the factory

Amarco Products reserves the right to discontinue a design or modify an existing design without prior notice

Customer :	Project :
Architect :	Sales Rep :

AT-250 Aluminum Roll-Up Grating w/ Rigid Corrugated Vinyl Insert

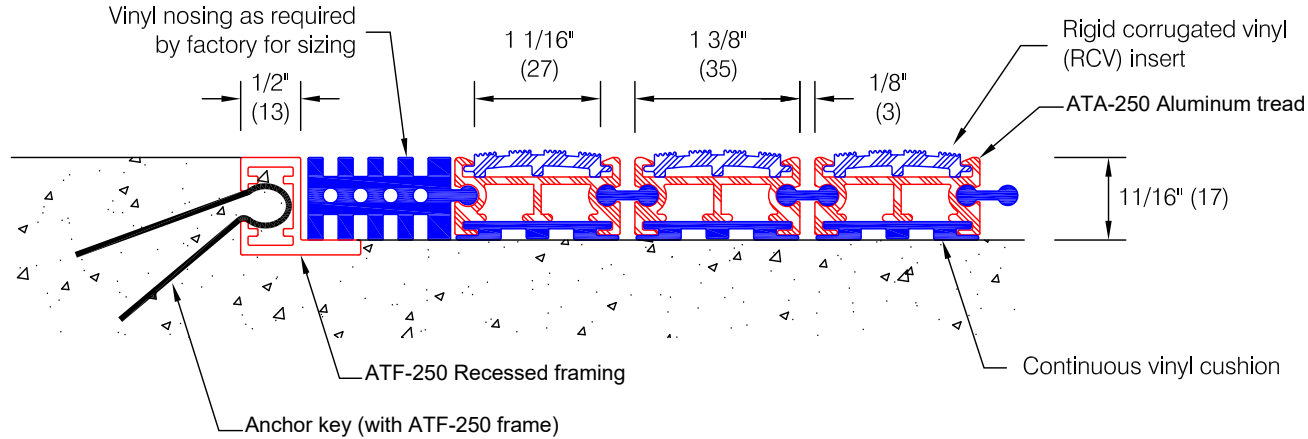

Features:


- Extruded aluminum treads alloy 6105-T5
- Continuous vinyl cushion for superior noise reduction
- 3/4" (19) deep for increased drainage ability
- Perforated hinge for added drainage
- Single section width to 144" (3568)

Finishes:


- Aluminum tread:
 - Mill finish (standard) #405
 - Medium bronze anodized #404
 - Clear anodized #403
 - Black anodized #462
- Rigid corrugated vinyl insert (colorable):
 - Select from manufacturer's color samples

Optional Framing:


* Amarco Products requires that exact opening dimensions be provided. Factory will fabricate mats 1/4" (6) smaller than exact opening dimensions to allow for proper fit on dimensions without nosing.

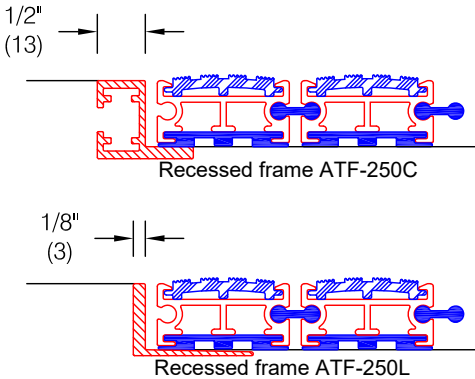

Hinge Detail:

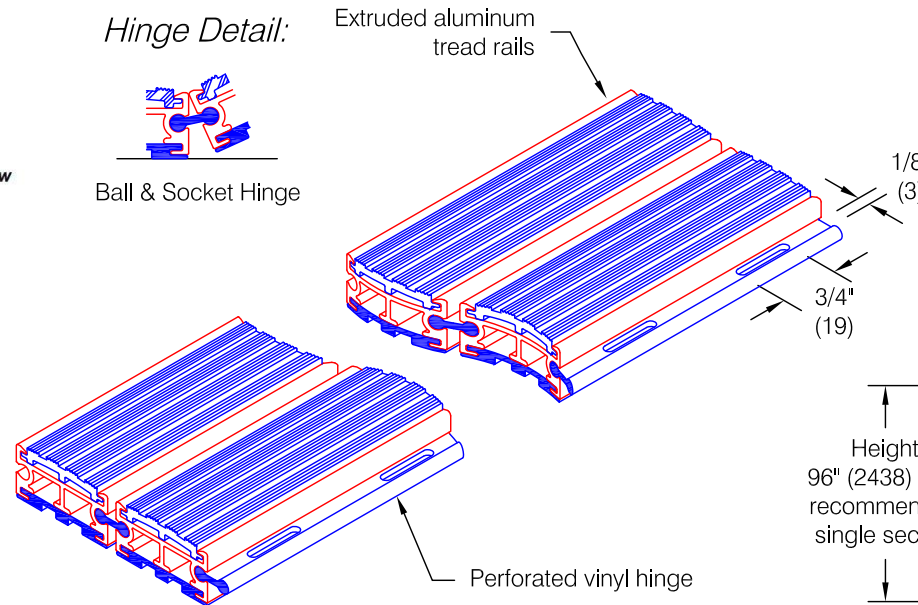


Sectioning information:

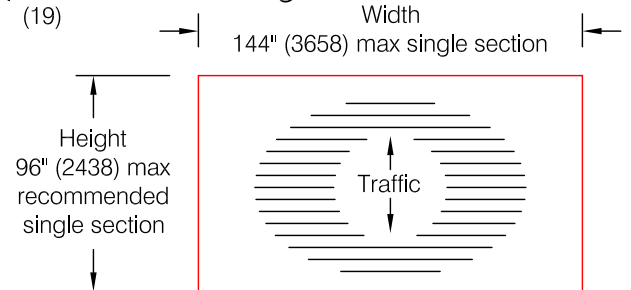

* Mats over 48 square feet may require sectioning as determined by the factory

Customer :	Project :	
Architect :	Sales Rep :	

AT-250 Aluminum Roll-Up Grating w/ Maxi-Tuft Carpet Insert

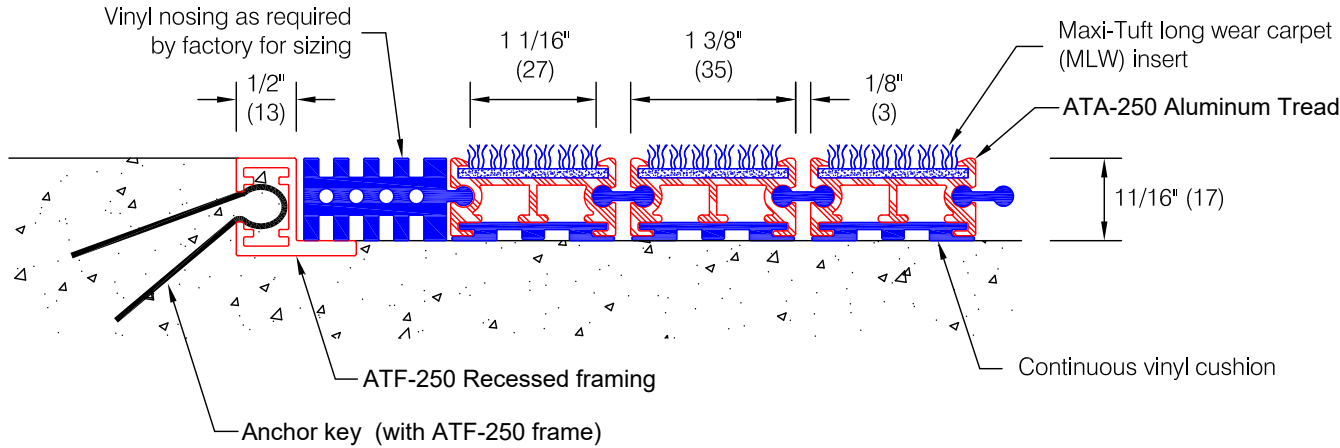

Features:

- Extruded aluminum treads alloy 6105-T5
- Continuous vinyl cushion for superior noise reduction
- 1 1/16" (17) deep for increased drainage ability
- Roll-Up for easy cleaning of recess
- Perforated hinge for added drainage
- Single section width to 144" (3568)
- Space dyed, 100% polyamide nylon, tetra-lobal fibers, 5/32 (4) pile height, 30 oz/sq yd
- Static Coefficient of Friction (ASTM D-2047-82)
Dry: 0.49, Wet: 0.77


Finishes:

- Aluminum tread:
 - Mill finish (standard) #405
 - Medium bronze anodized #404
 - Clear anodized #403
 - Black anodized #462
- Maxi-Tuft long wear carpet insert:
Select from manufacturer's color samples


Optional Framing:

Note On Dimensions:


* Amarco Products requires that exact opening dimensions be provided. Factory will fabricate mats 1/4" (6) smaller than exact opening dimensions to allow for proper fit on dimensions without nosing.

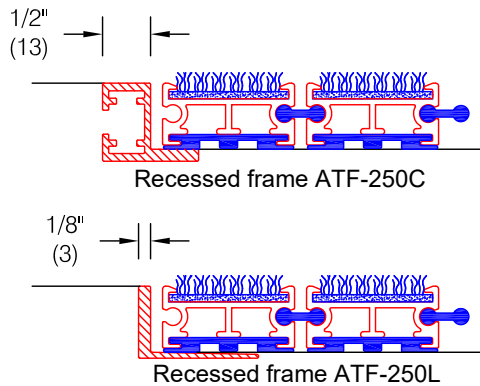

Hinge Detail:

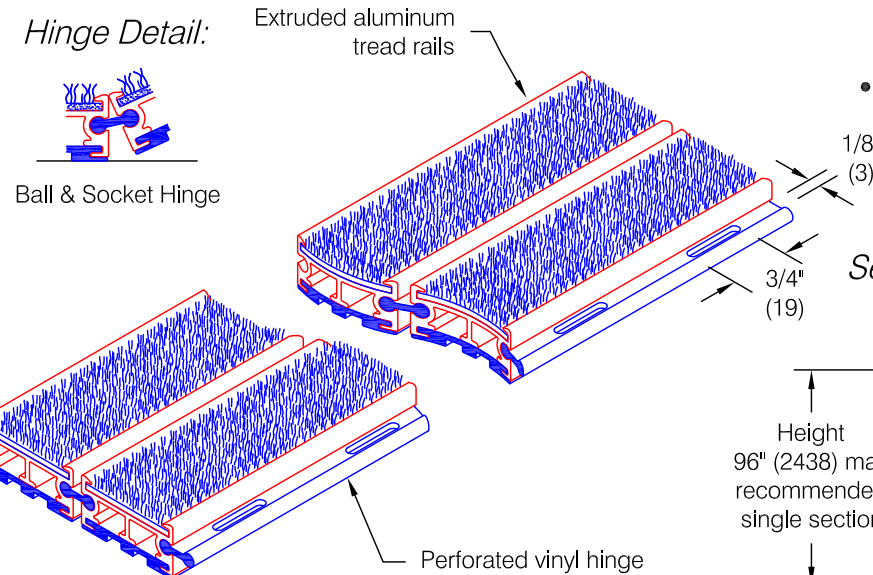


Sectioning information:

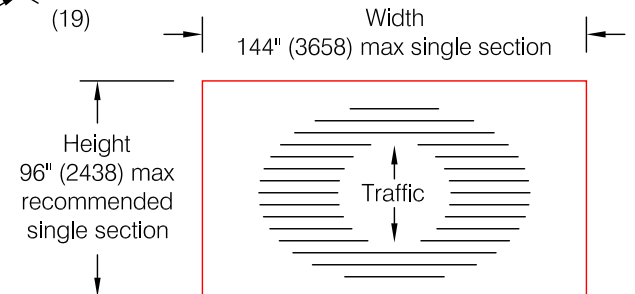

* Mats over 48 square feet may require sectioning as determined by the factory

Customer :	Project :	
Architect :	Sales Rep :	

AT-250 - 3/4" Aluminum Roll-Up Grating w/ Corrugated Aluminum

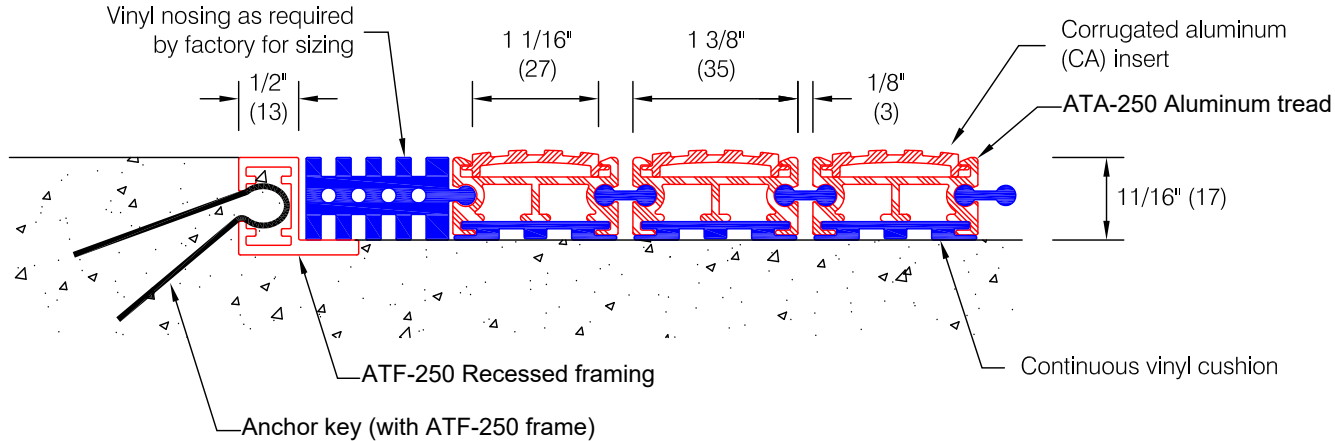

Features:

- Extruded aluminum treads alloy 6105-T5
- Continuous vinyl cushion for superior noise reduction
- 3/4" (19) deep for increased drainage ability
- Perforated hinge for added drainage
- Single section width to 144" (3568)
- Static Coefficient of Friction (ASTM D-2047-82)
Dry: 0.61, Wet: 0.92




Finishes:

- Aluminum tread:
 - Mill finish (standard) #405
 - Medium bronze anodized #404
 - Clear anodized #403
 - Black anodized #462
- Corrugated aluminum insert alloy 6105-T5:
 - Mill finish (standard) #405


Optional Framing:

* Amarco Products requires that exact opening dimensions be provided. Factory will fabricate mats 1/4" (6) smaller than exact opening dimensions to allow for proper fit on dimensions without nosing.

Hinge Detail:

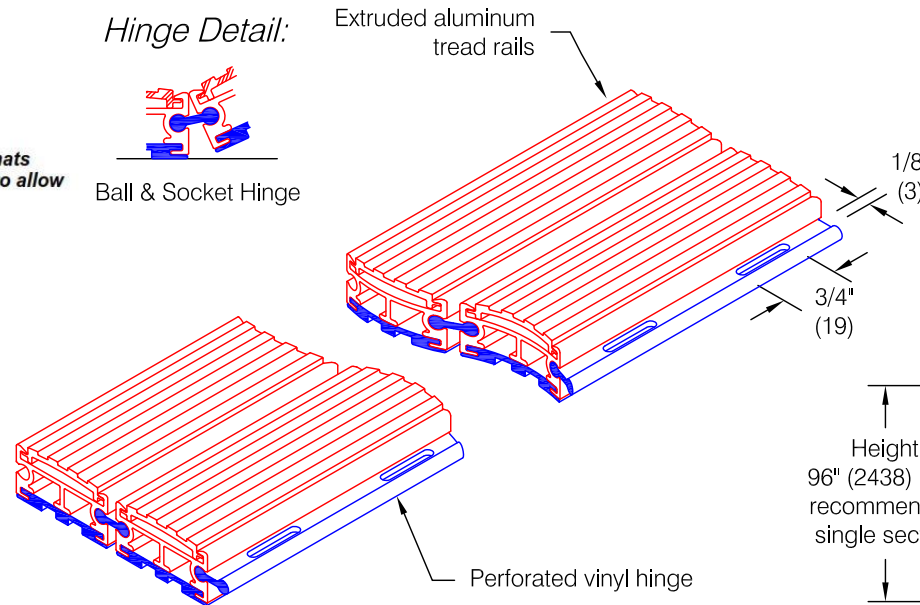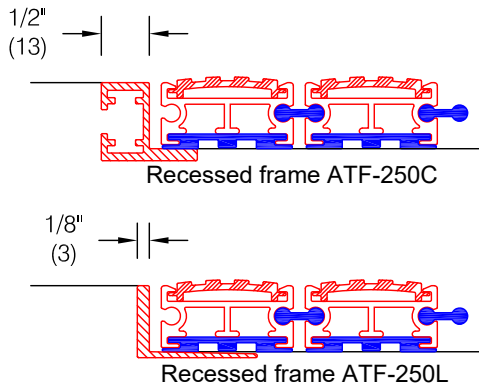

Sectioning information:

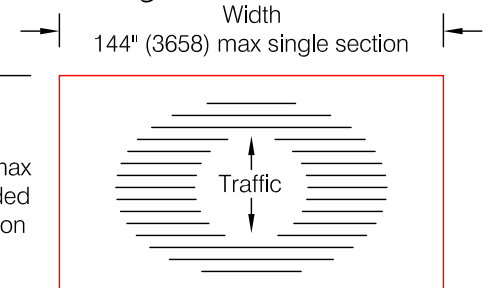


* Mats over 48 square feet may require sectioning as determined by the factory

Amarco Products reserves the right to discontinue a design or modify an existing design without prior notice

Customer :	Project :	
Architect :	Sales Rep :	

AT-250 - 3/4" Aluminum Roll-Up Grating w/ Bristle Filament Insert

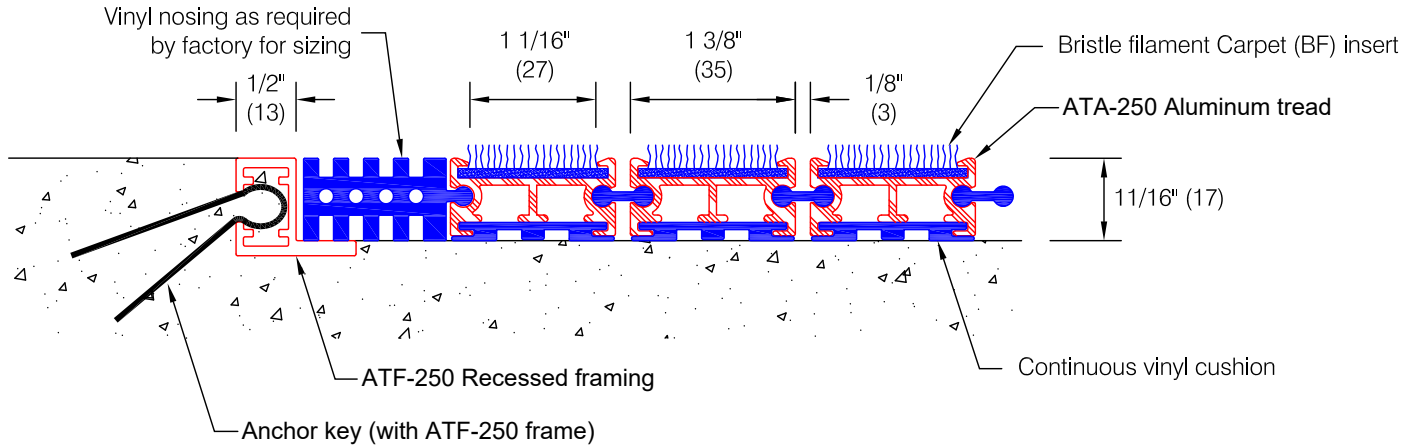


Features:

- Extruded aluminum treads alloy 6105-T5
- Continuous flexible vinyl cushion for superior noise reduction
- 3/4" (19) deep for increased drainage ability
- Perforated hinge for added drainage
- Single section width to 144" (3658)
- Solution dyed polypropylene fibers, 27 oz/sqyd with 50% Blend 600/12-Denier multi-filament and 595/D1 monofilament. Fibers are fusion bonded to continuous two-ply rigid backing.
- Fibers are waterproof with UV inhibitors for exterior use
- Static Coefficient of Friction (ASTM D2047) Dry: 0.64, Wet: 0.67


Optional Framing:

Note On Dimensions:

Amarco Products requires that exact opening dimensions be provided. Factory will fabricate mats 1/4" (6) smaller than exact opening dimensions to allow for proper fit on dimensions without nosing.

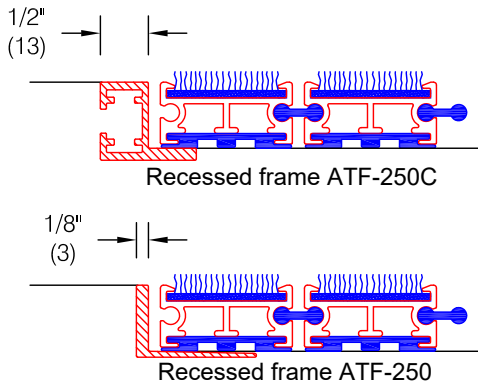


Hinge Detail:

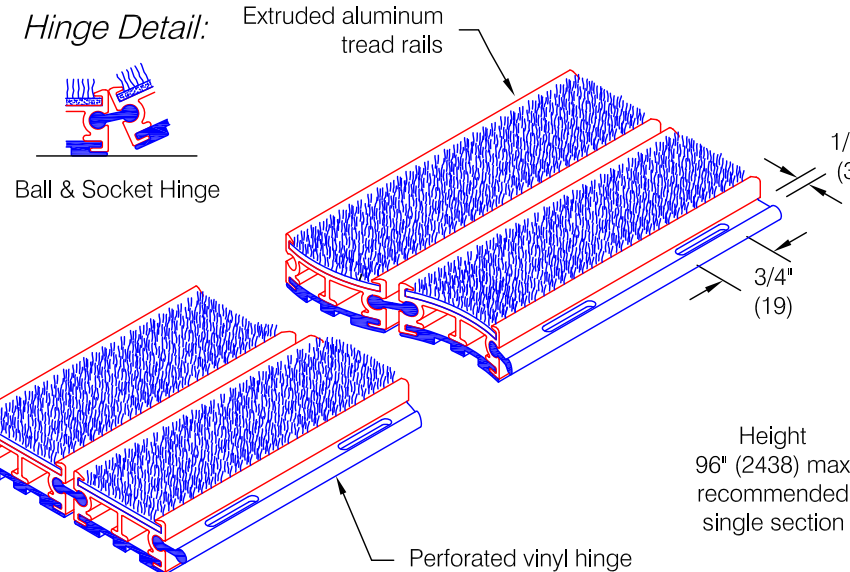

Finishes:

- Aluminum tread:
 - Mill finish (standard) #405
 - Medium bronze anodized #404
 - Clear anodized #403
 - Black anodized #462
- Vinyl cushion, nosing, and hinge: Black
- Bristle filament carpet insert: Manufacturer's standard colors

Sectioning information:

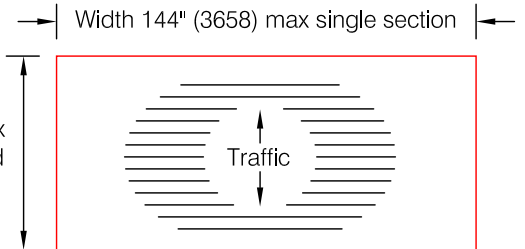

*** Mats over 48 square feet may require sectioning as determined by the factory**

Amarco Products reserves the right to discontinue a design or modify an existing design without prior notice

Customer :	Project :	
Architect :	Sales Rep :	