


AT-500 Vinyl Rail Recess Mat - Aluminum Abrasive Insert

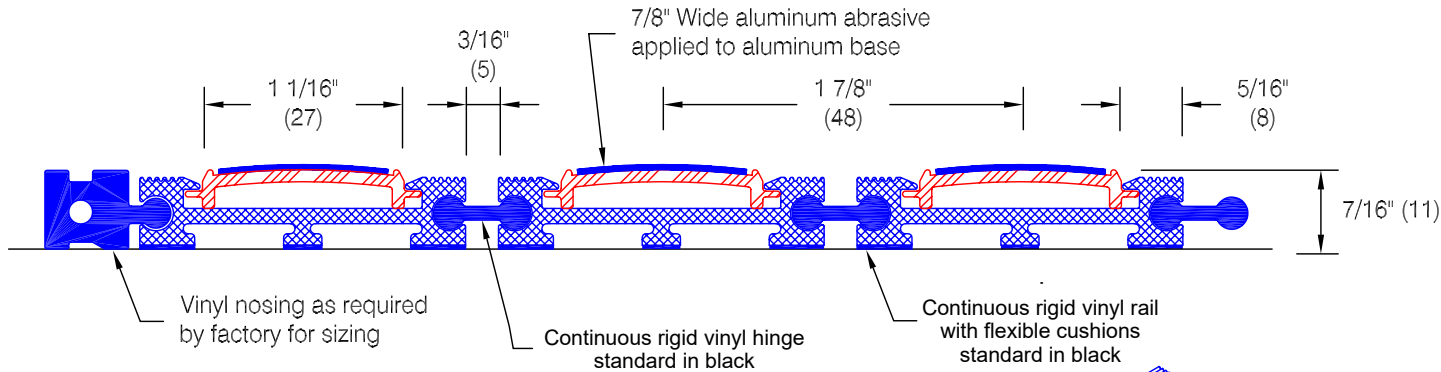


Features:


- Continuous vinyl hinge and cushion for superior noise reduction
- Roll-Up for easy cleaning of recess
- Perforated hinge for added drainage
- Single section width to 144" (3658)
- Aluminum abrasive insert: Extruded aluminum base with applied abrasive strip
- Static Coefficient of Friction (ASTM D-2047-82)
Dry: > 1.14, Wet: > 1.20

Optional Framing:


* **Amarco Products** requires that exact opening dimensions be provided. Factory will fabricate mats 1/4" (6) smaller than exact opening dimensions to allow for proper fit on dimensions without nosing.

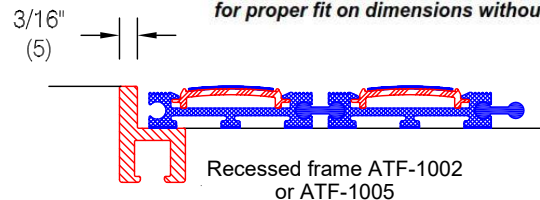

Recessed frame ATF-1002 or ATF-1005



Recessed frame ATF-125

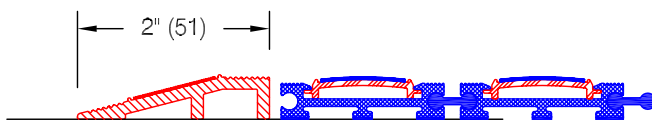


Surface frame ATF-225

Hinge Details:



Ball & Socket Hinge

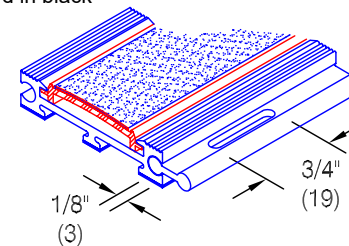

Perforated hinge

Optional Nosings:




Square vinyl nosing



Beveled vinyl nosing

Sectioning information:

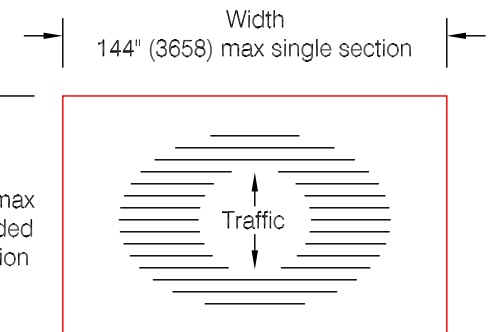


* **Mats over 48 square feet may require sectioning as determined by the factory**

Amarco Products reserves the right to discontinue a design or modify an existing design without prior notice

Customer :	Project :	
Architect :	Sales Rep :	

AT-500 Vinyl Rail Recess Mat - Nylon Carpet Insert

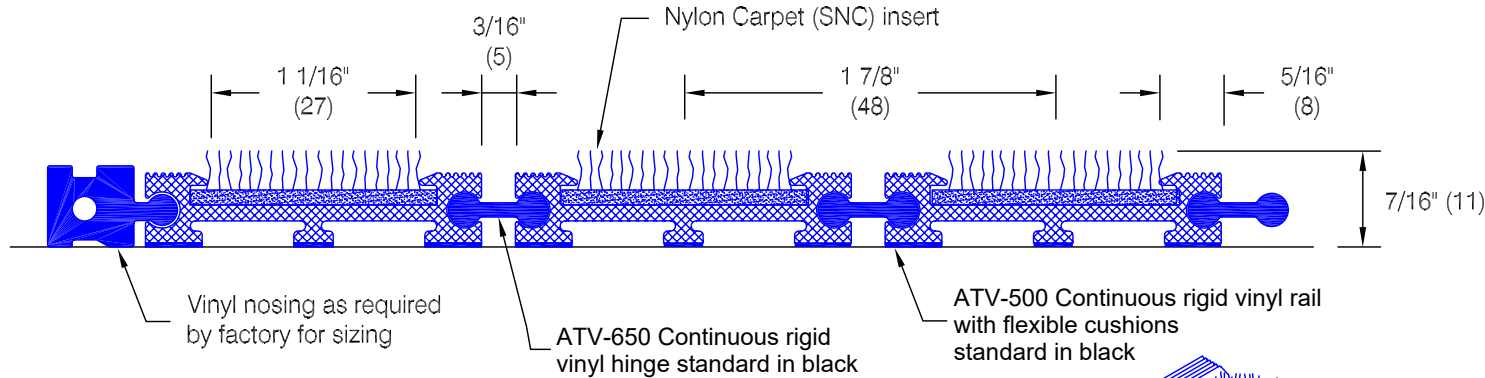

Features:




- Continuous vinyl hinge and cushion for superior noise reduction
- Roll-Up for easy cleaning of recess
- Perforated hinge for added drainage
- Single section width to 144" (3658)
- 100% solution dyed nylon fiber with 1/4" (6) finish pile height, 33.8 oz/sq yd in rigid backing
- Static Coefficient of Friction (ASTM D-2047-82)
Dry: 0.48, Wet: 0.67

Finishes:


- Vinyl rail and hinge: Black
- Rigid-Back Nylon carpet insert:
Manufacturer's standard colors

Optional Framing:

*** Amarco Products requires that exact opening dimensions be provided. Factory will fabricate mats 1/4" (6) smaller than exact opening dimensions to allow for proper fit.**

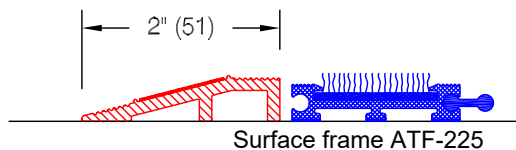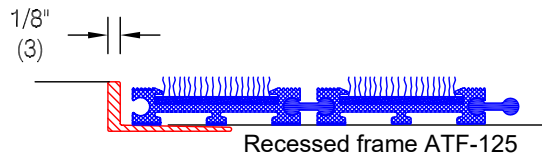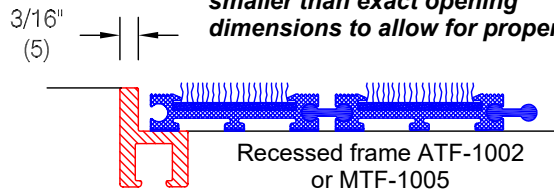


Hinge Details:

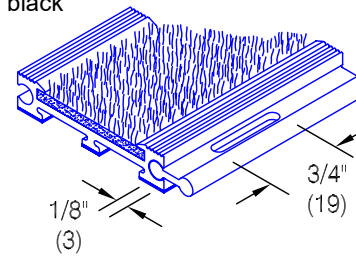


Perforated hinge

Optional Nosings:



Sectioning information:

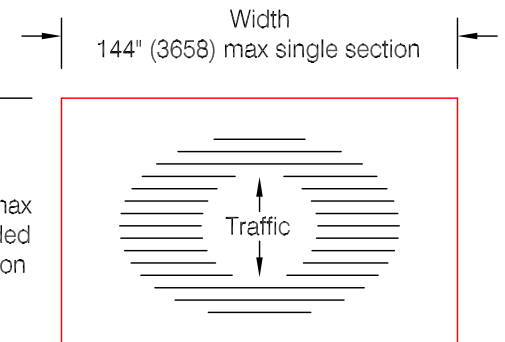

*** Mats over 48 square feet may require sectioning as determined by the factory**

Customer :


Architect :

Project :

Sales Rep :

ED.19.1c

AT-500 Vinyl Rail Recess Mat - Maxi-Tuft Carpet Insert

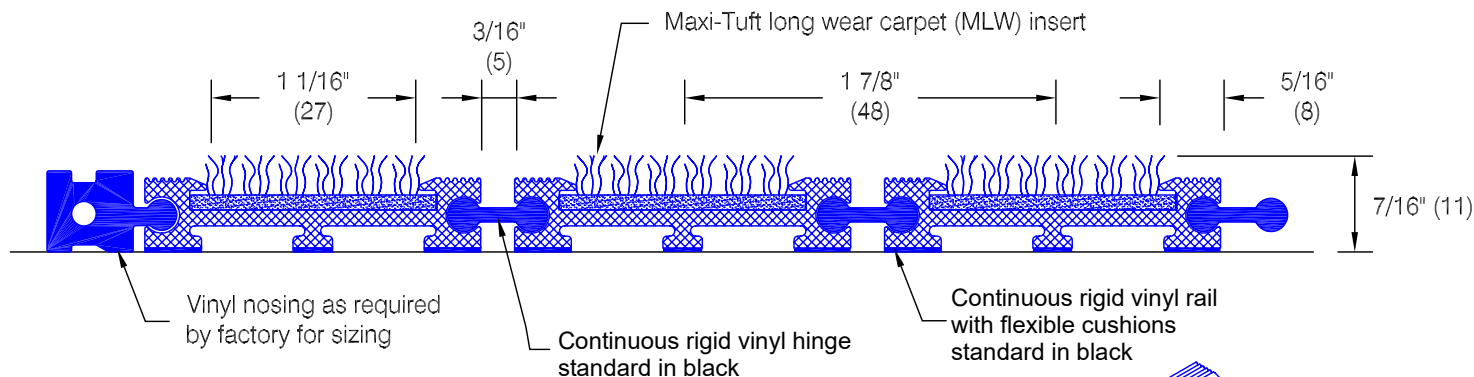

Features:




- Continuous vinyl hinge and cushion for superior noise reduction
- Roll-Up for easy cleaning of recess
- Perforated hinge for added drainage
- Single section width to 144" (3658)
- Space dyed, 100% polyamide nylon, tetra-lobal fibers, 5/32 (4) pile height, 30 oz/sq yd
- Static Coefficient of Friction (ASTM D-2047-82)
Dry: 0.49, Wet: 0.77

Finishes:



- Vinyl rail and hinge: Black
- Maxi-Tuft long wear carpet insert:
Manufacturer's standard colors

Optional Framing:

* **Amarco Products requires that exact opening dimensions be provided. Factory will fabricate mats 1/4" (6) smaller than exact opening dimensions to allow for proper fit on dimensions without nosing.**

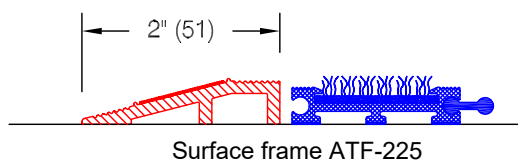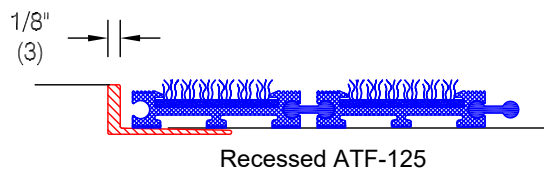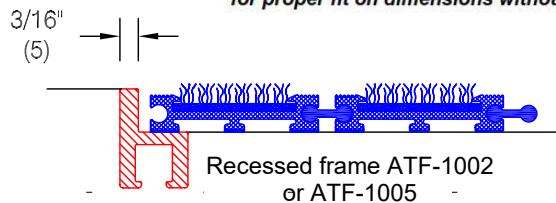


Hinge Details:

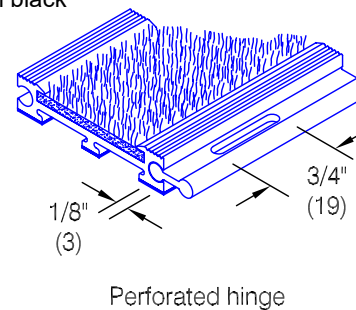

Optional Nosings:



Sectioning information:

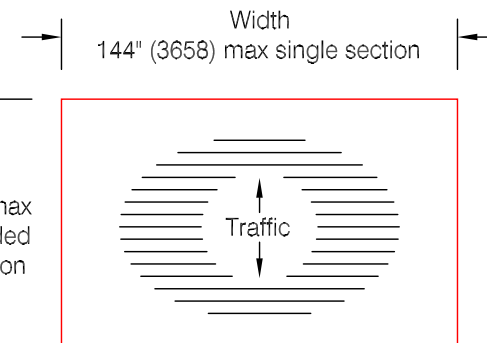

* **Mats over 48 square feet may require sectioning as determined by the factory**

Amarco Products reserves the right to discontinue a design or modify an existing design without prior notice

Customer :


Architect :

Project :

Sales Rep :

ED.19.6c

AT-500 Vinyl Rail Recess Mat - Corrugated Aluminum Insert

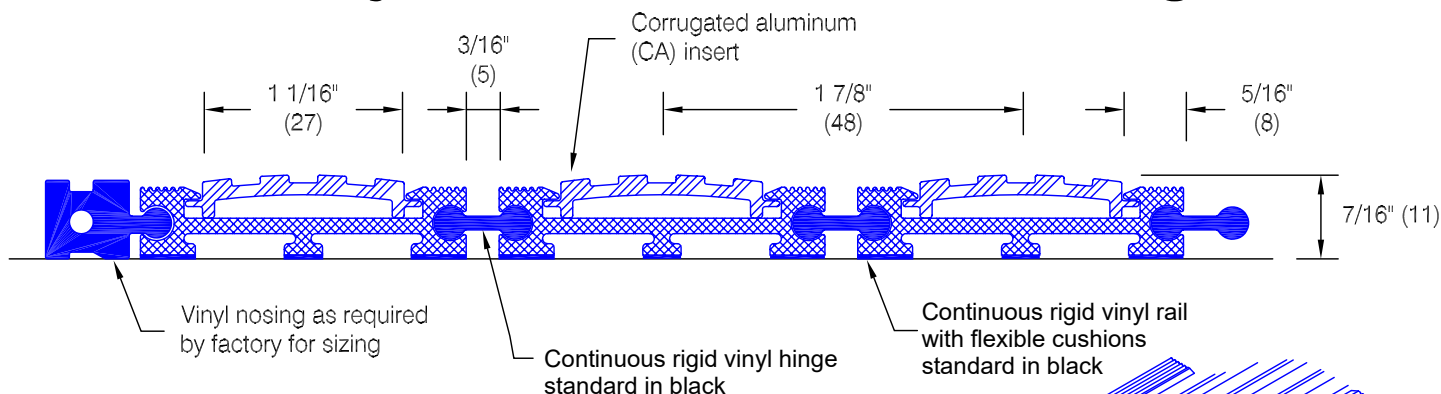

Features:




- Continuous vinyl hinge and cushion for superior noise reduction
- Roll-Up for easy cleaning of recess
- Perforated hinge for added drainage
- Single section width to 144\" (3658)
- Static Coefficient of Friction (ASTM D-2047-82)
Dry: 0.61, Wet: 0.92

Finishes:


- Vinyl rail and hinge: Black
- Corrugated aluminum insert alloy 6105-T5:
Mill finish (standard) #405

Optional Framing:

* **Amarco Products** requires that exact opening dimensions be provided. Factory will fabricate mats 1/4\" (6) smaller than exact opening dimensions to allow for proper fit on dimensions without nosing.

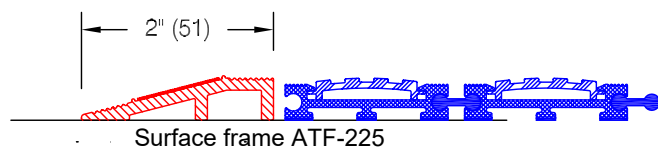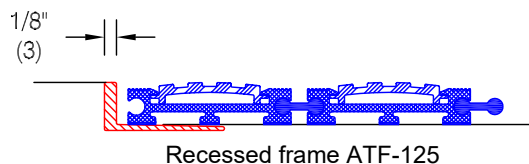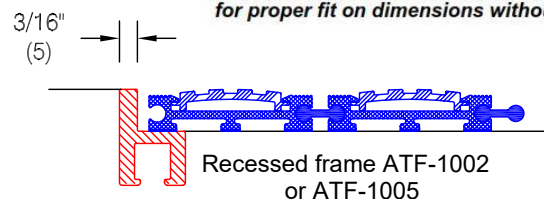


Hinge Details:



Optional Nosings:



Sectioning information:

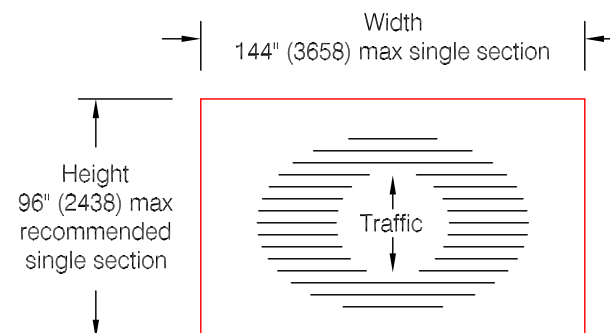

* **Mats over 48 square feet may require sectioning as determined by the factory**

Amarco Products reserves the right to discontinue a design or modify an existing design without prior notice

Customer :


Architect :

Project :

Sales Rep :

ED.19.4b

AT-500 Vinyl Rail Recess Mat - Bristle Filament Carpet Insert



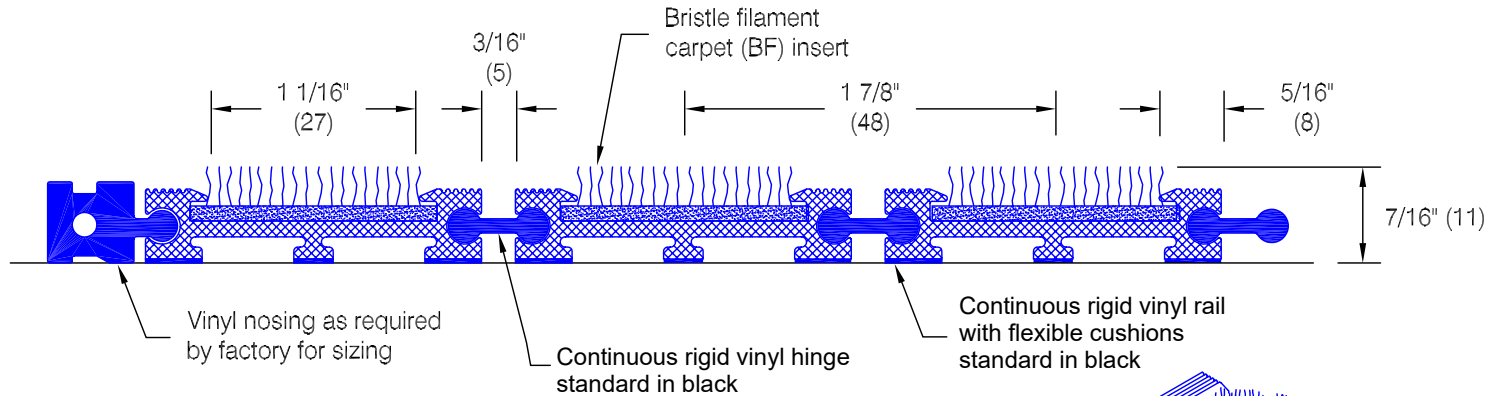


Features:


- Extruded vinyl treads
- Continuous co-extruded flexible vinyl cushion for superior noise reduction
- Roll-Up for easy cleaning of recess
- Perforated hinge for added drainage
- Single section width to 144" (3658)
- Solution dyed polypropylene fibers, 27 oz/sqyd with 50% Blend 600/12-Denier multi-filament and 595/D1 monofilament. Fibers are fusion bonded to continuous two-ply rigid backing.
- Fibers are waterproof with UV inhibitors for exterior use
- Static Coefficient of Friction (ASTM D2047) Dry: 0.64, Wet: 0.67

Optional Framing:


* Amarco Products requires that exact opening dimensions be provided. Factory will fabricate mats 1/4" (6) smaller than exact opening dimensions to allow for proper fit on dimensions without nosing.

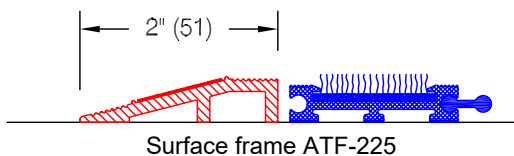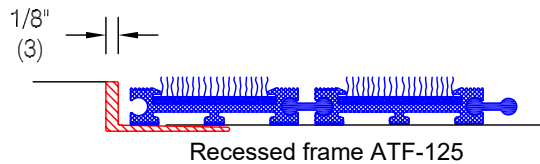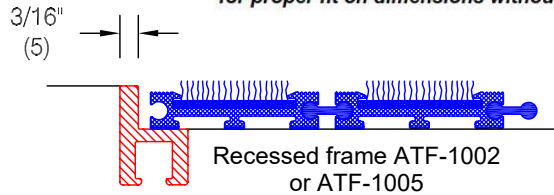

Hinge Details:

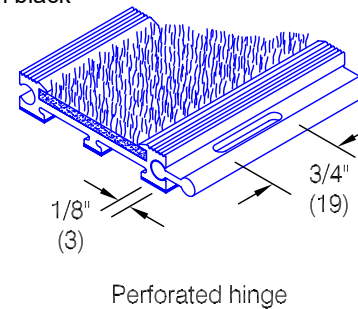


Optional Nosings:



Finishes:

- Vinyl rail and hinge: Black
- Bristle filament carpet insert: Manufacturer's standard colors

Sectioning information:

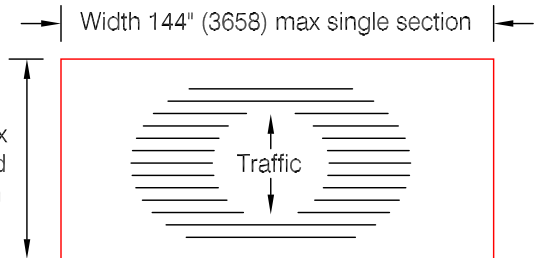

* Mats over 48 square feet may require sectioning as determined by the factory

Amarco Products reserves the right to discontinue a design or modify an existing design without prior notice

Customer :

Project :

Architect :

Sales Rep :

ED.19.2c