

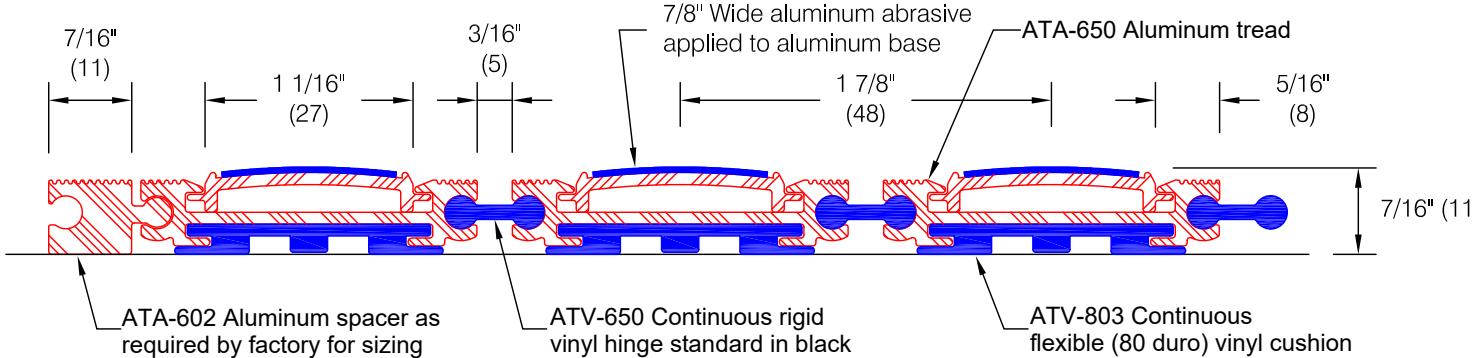



AT-650 - 7/16" Vinyl-Hinge Recess Mat w/ Aluminum Abrasive Insert

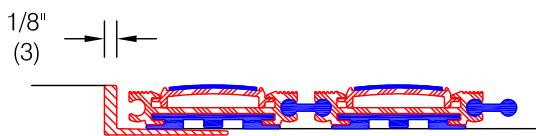

Optional Framing:


* Amaro Products requires that exact opening dimensions be provided. Factory will fabricate mats 1/4" (6) smaller than exact opening dimensions to allow for proper fit on dimensions without nosing.

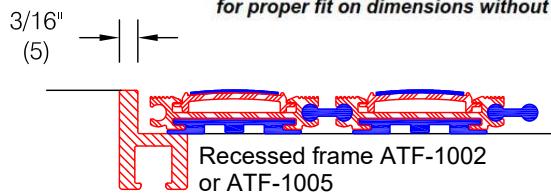

Hinge Details:




Ball & Socket Hinge

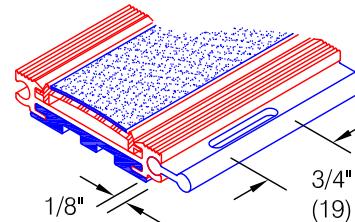

Perforated hinge

Optional Nosings:



Square vinyl nosing



Beveled vinyl nosing

Features:


- Extruded aluminum treads alloy 6063-T6
- Continuous vinyl hinge and cushion for superior noise reduction
- Roll-Up for easy cleaning of recess
- Perforated hinge for added drainage
- Single section width to 144" (3658)
- Aluminum abrasive insert: Extruded aluminum base with applied abrasive strip
- Static Coefficient of Friction (ASTM D-2047-82)
 - Dry: > 1.14, Wet: > 1.20

Finishes:

- Aluminum tread and spacer:
 - Mill finish (standard) #405
 - Medium bronze anodized #404
 - Clear anodized #403
 - Black anodized #462
- Vinyl cushion and hinge: Black
- Insert base: Mill finish aluminum #405
- Insert: Mill finish aluminum #405, w/ an applied manufacturer's standard color abrasive strip


Sectioning information:

Width
→ 144" (3658) max single section ←

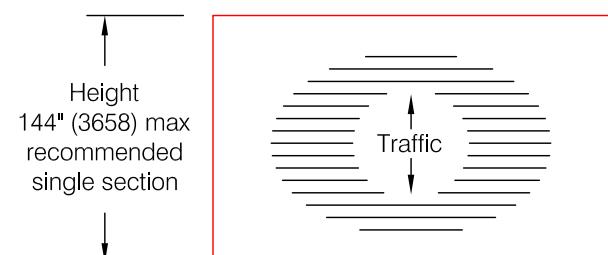


* Mats over 66 square feet may require sectioning as determined by the factory


AT-650 - 7/16" Vinyl-Hinge Recess Mat w/ Bristle Filament Insert

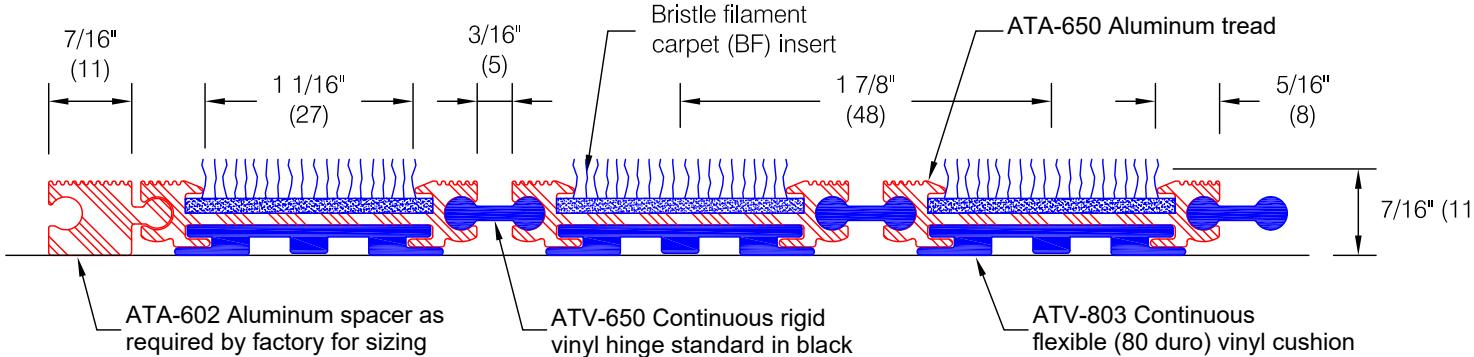

Optional Framing:

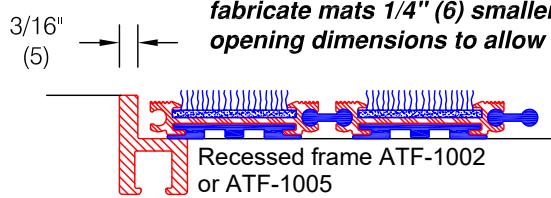

* Pawling requires that exact opening dimensions be provided. Factory will fabricate mats 1/4" (6) smaller than exact opening dimensions to allow for proper fit.

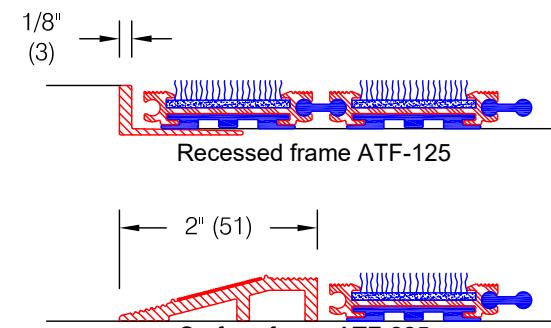

Recessed frame ATF-125




Surface frame ATF-225

Hinge Details:




Ball & Socket Hinge

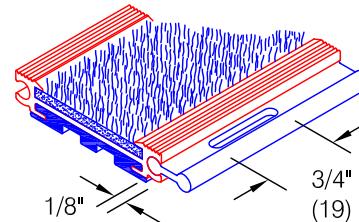

Perforated hinge

Optional Nosings:



Square vinyl nosing



Beveled vinyl nosing

Features:

- Extruded aluminum treads alloy 6063-T6
- Continuous flexible vinyl cushion for superior noise reduction
- Roll-Up for easy cleaning of recess
- Perforated hinge for added drainage
- Single section width to 144" (3658)
- Solution dyed polypropylene fibers, 27 oz/sqyd with 50% Blend 600/12-Denier multi-filament and 595/D1 monofilament. Fibers are fusion bonded to continuous two-ply rigid backing.
- Fibers are waterproof with UV inhibitors for exterior use
- Static Coefficient of Friction (ASTM D2047) Dry: 0.64, Wet: 0.67

Finishes:

- Aluminum tread and spacers: Mill finish (standard) #405 Medium bronze anodized #404 Clear anodized #403 Black anodized #462
- Vinyl cushion and hinge: Black
- Bristle filament insert: Manufacturer's standard colors

Sectioning information:



* Mats over 66 square feet may require sectioning as determined by the factory


Customer :

Project :

Architect :




Sales Rep :

AT-650 - 7/16" Vinyl-Hinge Recess Mat w/ Corrugated Aluminum Insert

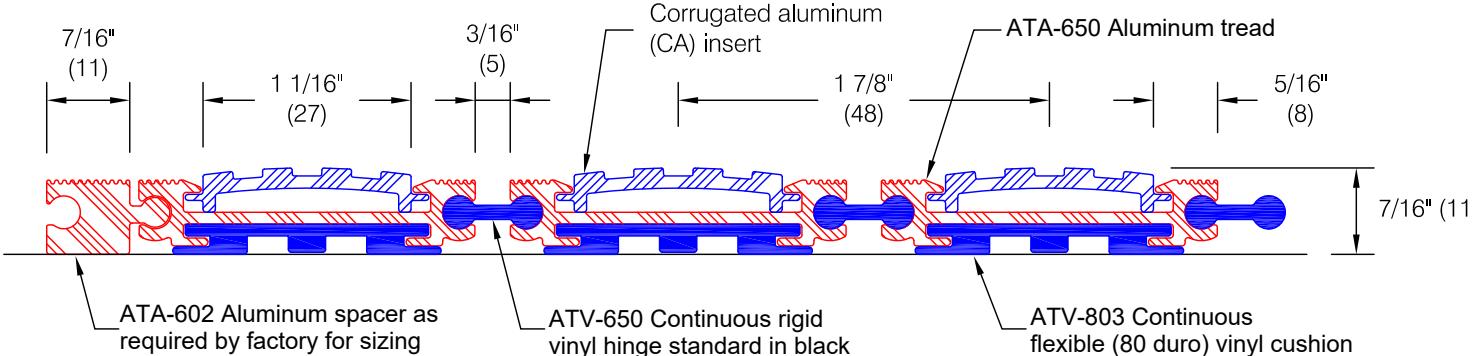

Optional Framing:


- * Amaro Products requires that exact opening dimensions be provided. Factory will fabricate mats 1/4" (6) smaller than exact opening dimensions to allow for proper fit on dimensions without nosing.

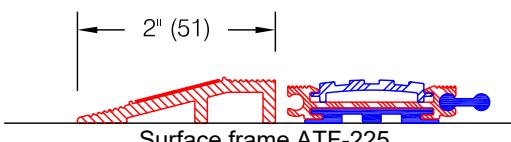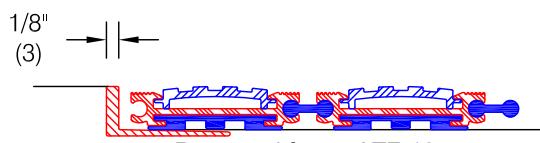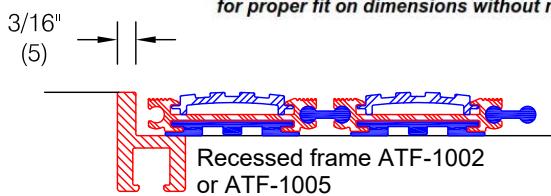

Hinge Details:




Ball & Socket Hinge

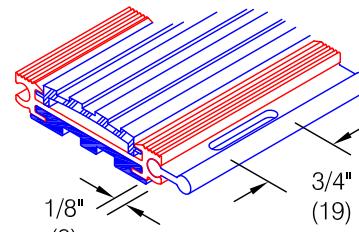

Perforated hinge

Optional Nosings:



Square vinyl nosing



Beveled vinyl nosing

Features:


- Extruded aluminum treads alloy 6063-T6
- Continuous vinyl hinge and cushion for superior noise reduction
- Roll-Up for easy cleaning of recess
- Perforated hinge for added drainage
- Single section width to 144" (3658)
- Static Coefficient of Friction (ASTM D-2047-82)
Dry: 0.61, Wet: 0.92

Finishes:

- Aluminum tread and spacer:
Mill finish (standard) #405
Medium bronze anodized #404
Clear anodized #403
Black anodized #462
- Vinyl cushion and hinge: Black
- Corrugated aluminum insert alloy 6105-T5:
Mill finish (standard) #405


Sectioning information:

Width
→ 144" (3658) max single section →

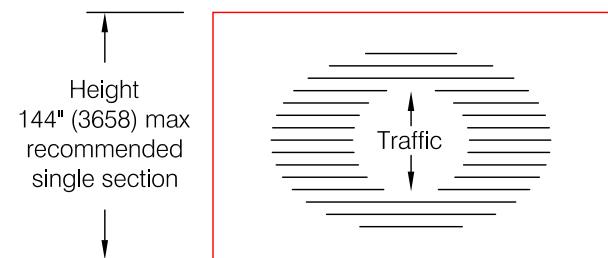


* Mats over 66 square feet may require sectioning as determined by the factory

AL-Track 650 - 7/16" Vinyl-Hinge Recess Mat w/ Maxi-Tuft Long Wear Insert

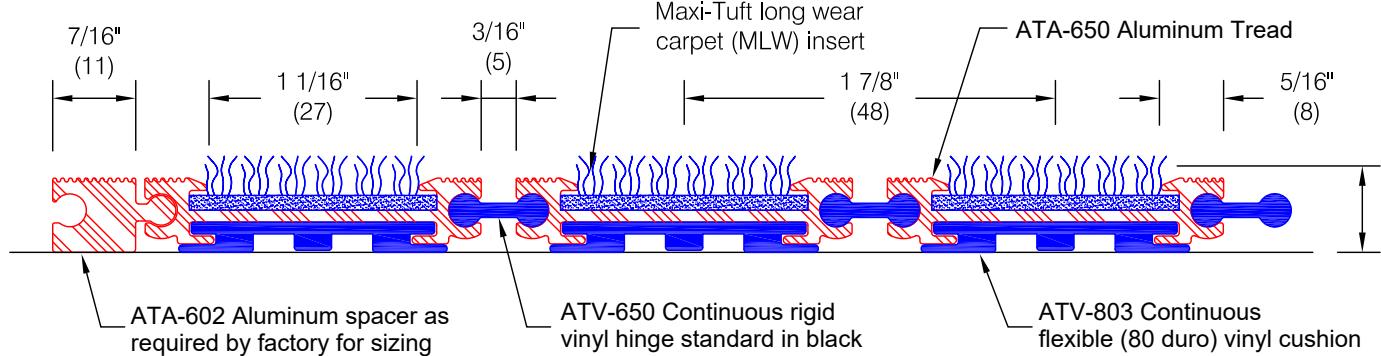


Optional Framing:


Amarco Products requires that exact opening dimensions be provided. Factory will fabricate mats 1/4" (6) smaller than exact opening dimensions to allow for proper fit on dimensions without nosing.

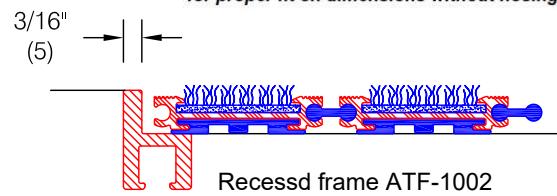

Recessed frame ATF-1002 or ATF-1005

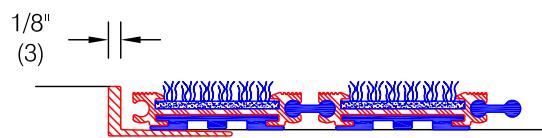

Recessed frame ATF-125

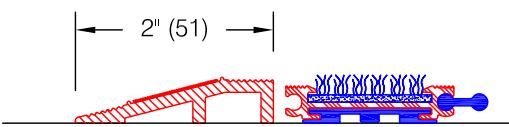


Surface frame ATF-225

Hinge Details:




Ball & Socket Hinge

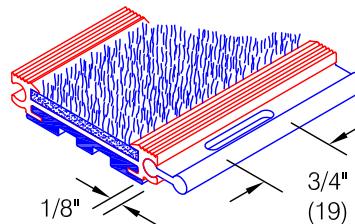

Perforated hinge (standard)

Optional Nosings:



Square vinyl nosing (see ED.20.0)



Beveled vinyl nosing (see ED.21.0)


Features:

- Extruded aluminum treads alloy 6063-T6
- Continuous vinyl cushion for superior noise reduction
- Roll-Up for easy cleaning of recess
- Perforated hinge for added drainage
- Single section width to 144" (3658)
- Space dyed, 100% polyamide nylon, tetra-lobal fibers, 5/32 (4) pile height, 30 oz/sq yd
- Static Coefficient of Friction (ASTM D-2047-82)
Dry: 0.49, Wet: 0.77

Finishes:

- Aluminum tread and spacer:
Mill finish (standard) #405
Medium bronze anodized #404
Clear anodized #403
Black anodized #462
- Vinyl cushion and hinge: Black
- Maxi-Tuft long wear carpet insert: Manufacturer's standard colors

Sectioning information:

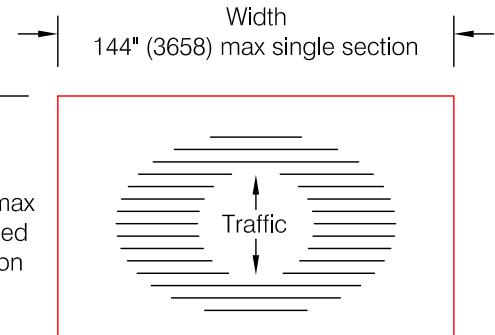

* Mats over 66 square feet may require sectioning as determined by the factory

Amarco Products reserves the right to discontinue a design or modify an existing design without prior notice


Customer :

Project :


Architect :

Sales Rep :



AT-650 - 7/16" Vinyl-Hinge Recess Mat w/ Rigid Corrugated Vinyl Insert

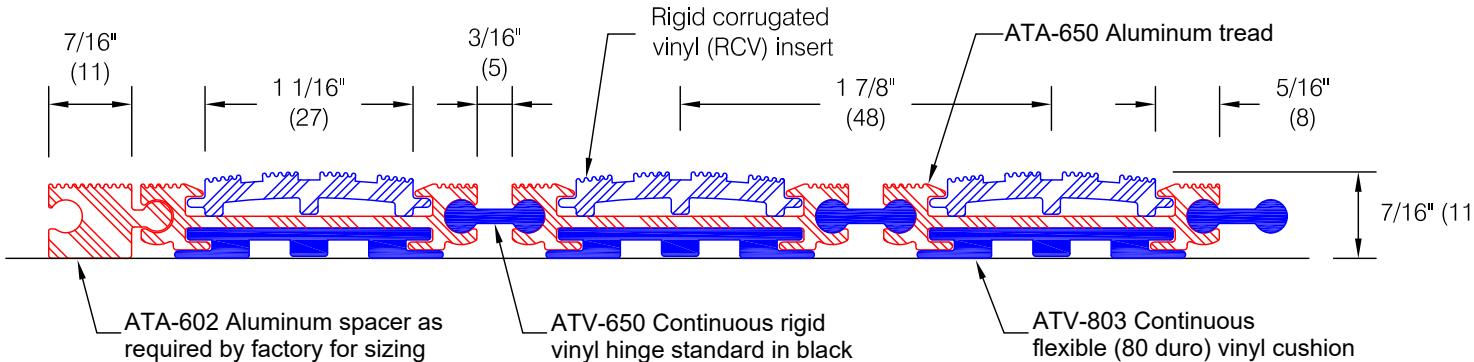


Optional Framing:

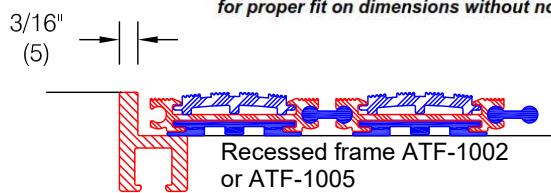


* Amaro Products requires that exact opening dimensions be provided. Factory will fabricate mats 1/4" (6) smaller than exact opening dimensions to allow for proper fit on dimensions without nosing.

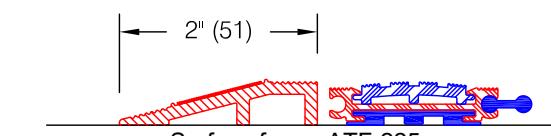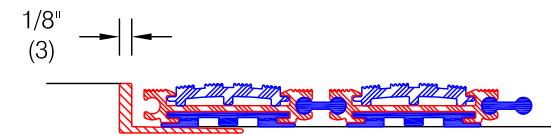

Hinge Details:




Ball & Socket Hinge

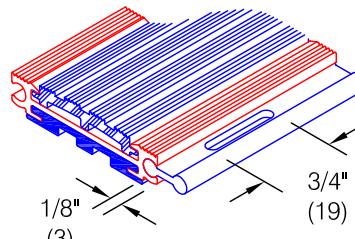

Perforated hinge

Optional Nosings:



Square vinyl nosing



Beveled vinyl nosing

Features:


- Extruded aluminum treads alloy 6063-T6
- Continuous vinyl hinge and cushion for superior noise reduction
- Roll-Up for easy cleaning of recess
- Perforated hinge for added drainage
- Single section width to 144" (3658)
- Rigid corrugated vinyl insert (colorable)

Finishes:

- Aluminum tread and spacer:
 - Mill finish (standard) #405
 - Medium bronze anodized #404
 - Clear anodized #403
 - Black anodized #462
- Vinyl cushion and hinge: Black
- Rigid corrugated vinyl insert: Manufacturer's standard colors


Sectioning information:

Width
144" (3658) max single section

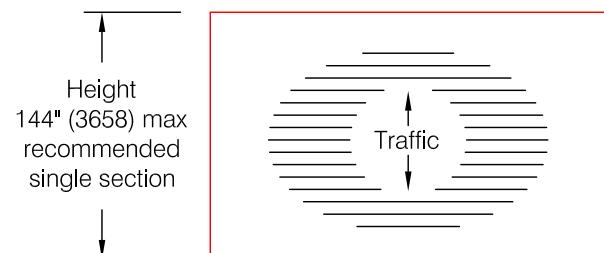




* Mats over 66 square feet may require sectioning as determined by the factory

AT-650 - 7/16" Vinyl-Hinge Recess Mat w/ Nylon Carpet Insert

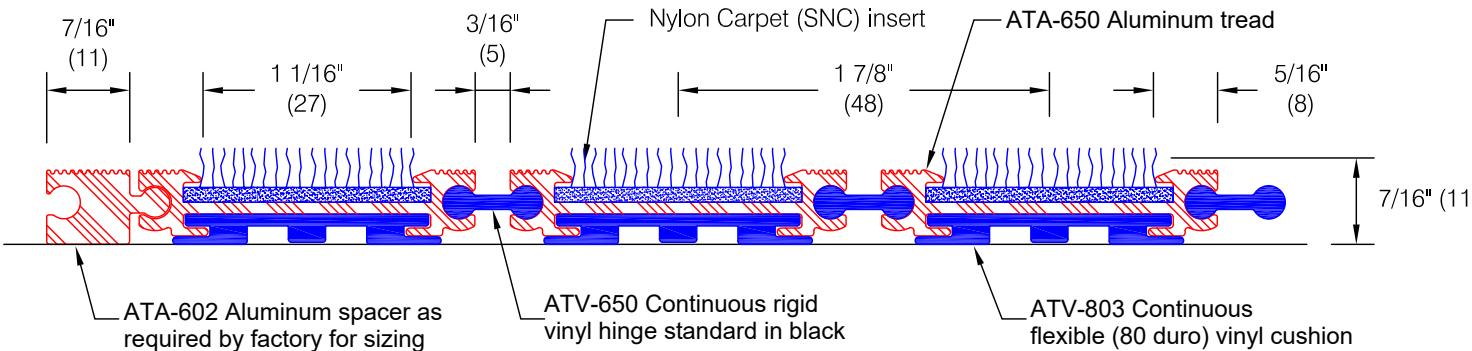


Optional Framing:


- * Amaro Products requires that exact opening dimensions be provided. Factory will fabricate mats 1/4" (6) smaller than exact opening dimensions to allow for proper fit on dimensions without nosing.

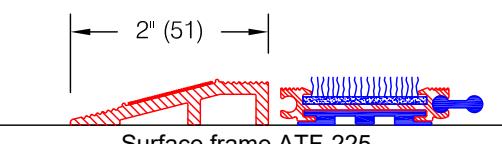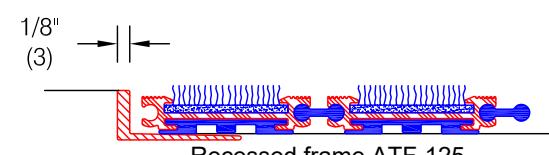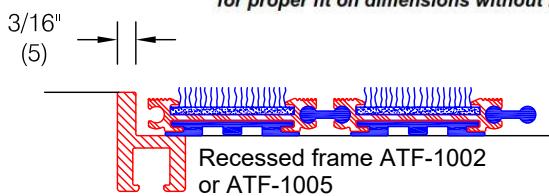

Hinge Details:




Ball & Socket Hinge

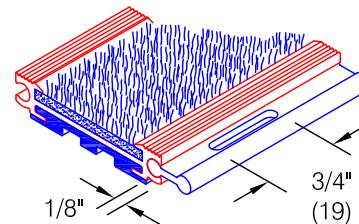

Perforated hinge

Optional Nosings:



Square vinyl nosing (see ED.20.0)



Beveled vinyl nosing (see ED.21.0)


Features:

- Extruded aluminum treads alloy 6063-T6
- Continuous vinyl hinge and cushion for superior noise reduction
- Roll-Up for easy cleaning of recess
- Perforated hinge for added drainage
- Single section width to 144" (3658)
- 100% solution dyed nylon fiber with 1/4" (6) finish pile height, 33.8 oz/sq yd in rigid backing
- Static Coefficient of Friction (ASTM D-2047-82)
Dry: 0.48, Wet: 0.67

Finishes:

- Aluminum tread and spacer:
Mill finish (standard) #405
Medium bronze anodized #404
Clear anodized #403
Black anodized #462
- Vinyl cushion and hinge: Black
- Rigid-Back Nylon carpet insert:
Manufacturer's standard colors

Sectioning information:

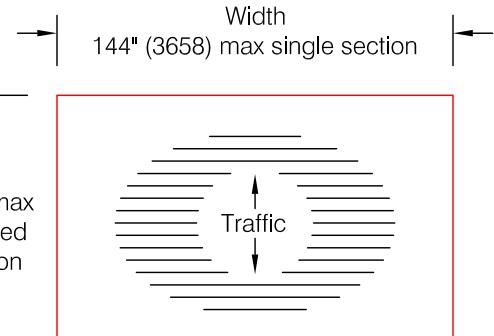

* Mats over 66 square feet may require sectioning as determined by the factory

Amarco Products reserves the right to discontinue a design or modify an existing design without prior notice

Customer :


Project :

Architect :

Sales Rep :

Entrance Mats & Gratings

ATF-125 Aluminum Frame

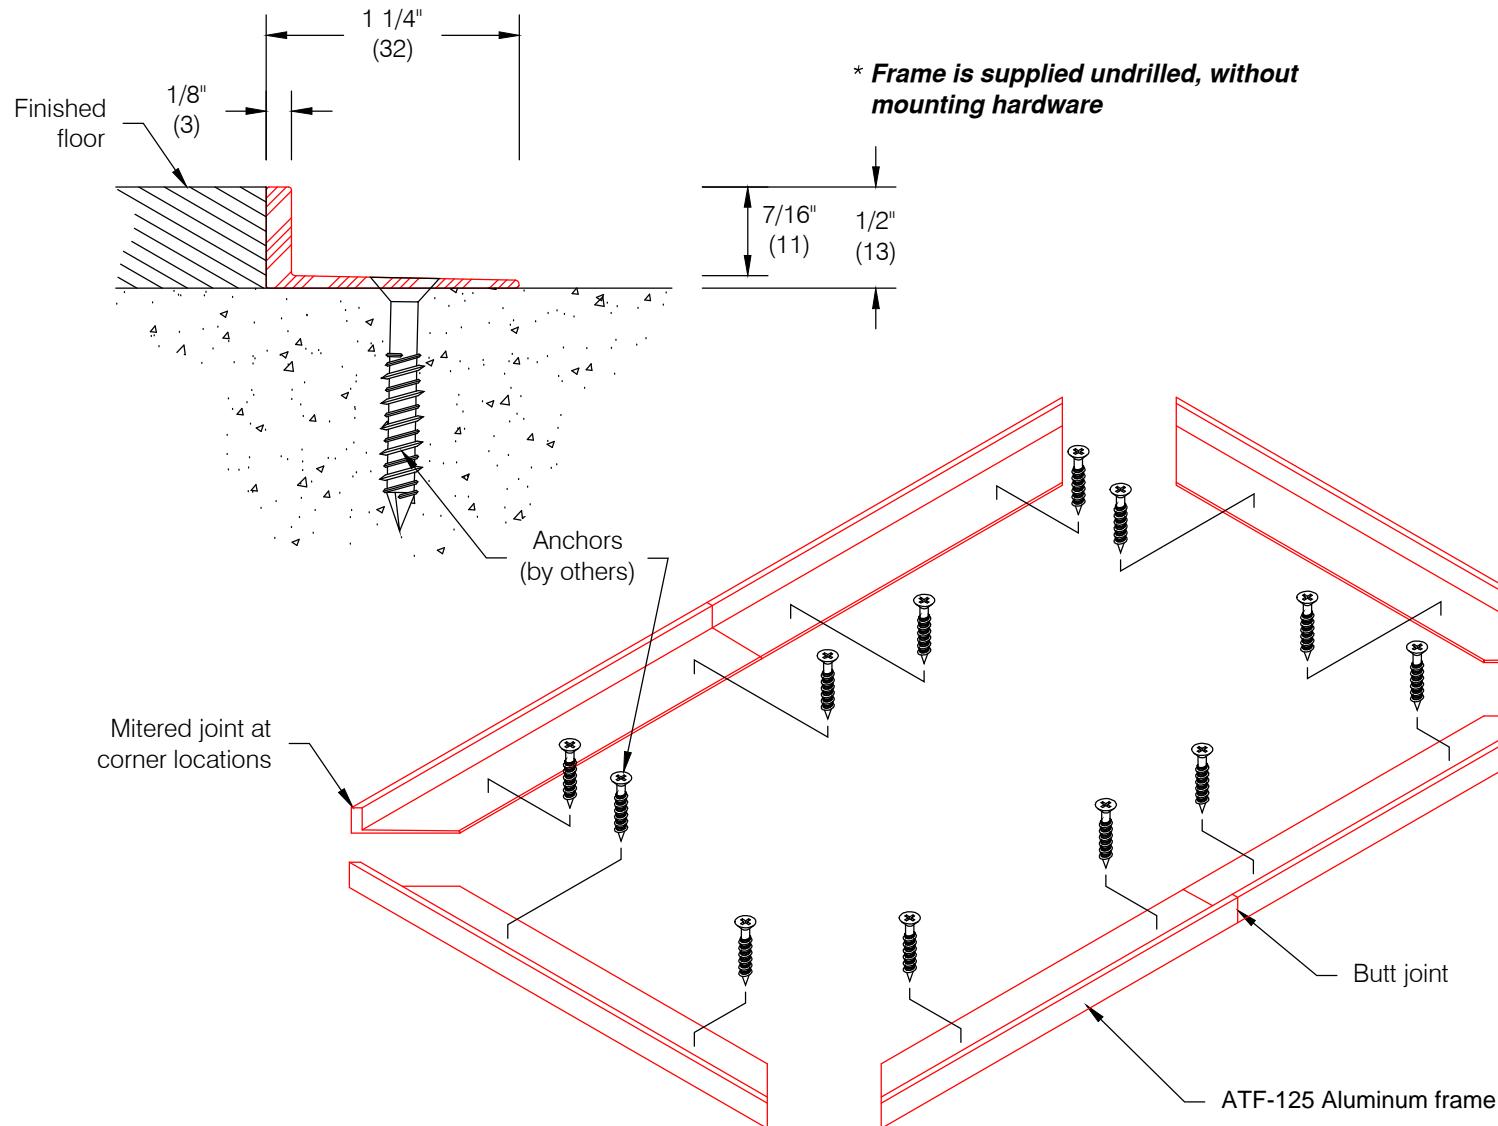

Features:

- Use for AT-800, AT-650, AT-500, or any 3/8" (10mm) - 5/8" (16mm) thick mats
- Extruded aluminum alloy 6063-T5
- Stock length: 12'-3" (3734mm)
- Weight: 0.15 lbs / lf

Installation Options:


- Surface mounted, mechanically fastened
- Recessed, mechanically fastened
- Mounting hardware spaced at 18" (457mm) on center or as required

Standard Finishes:

- Mill Finish #405
- Clear anodized #403
- Medium bronze anodized #404
- Black anodized #462

Entrance Mats & Gratings

ATF-1002 Aluminum Recessed Frame

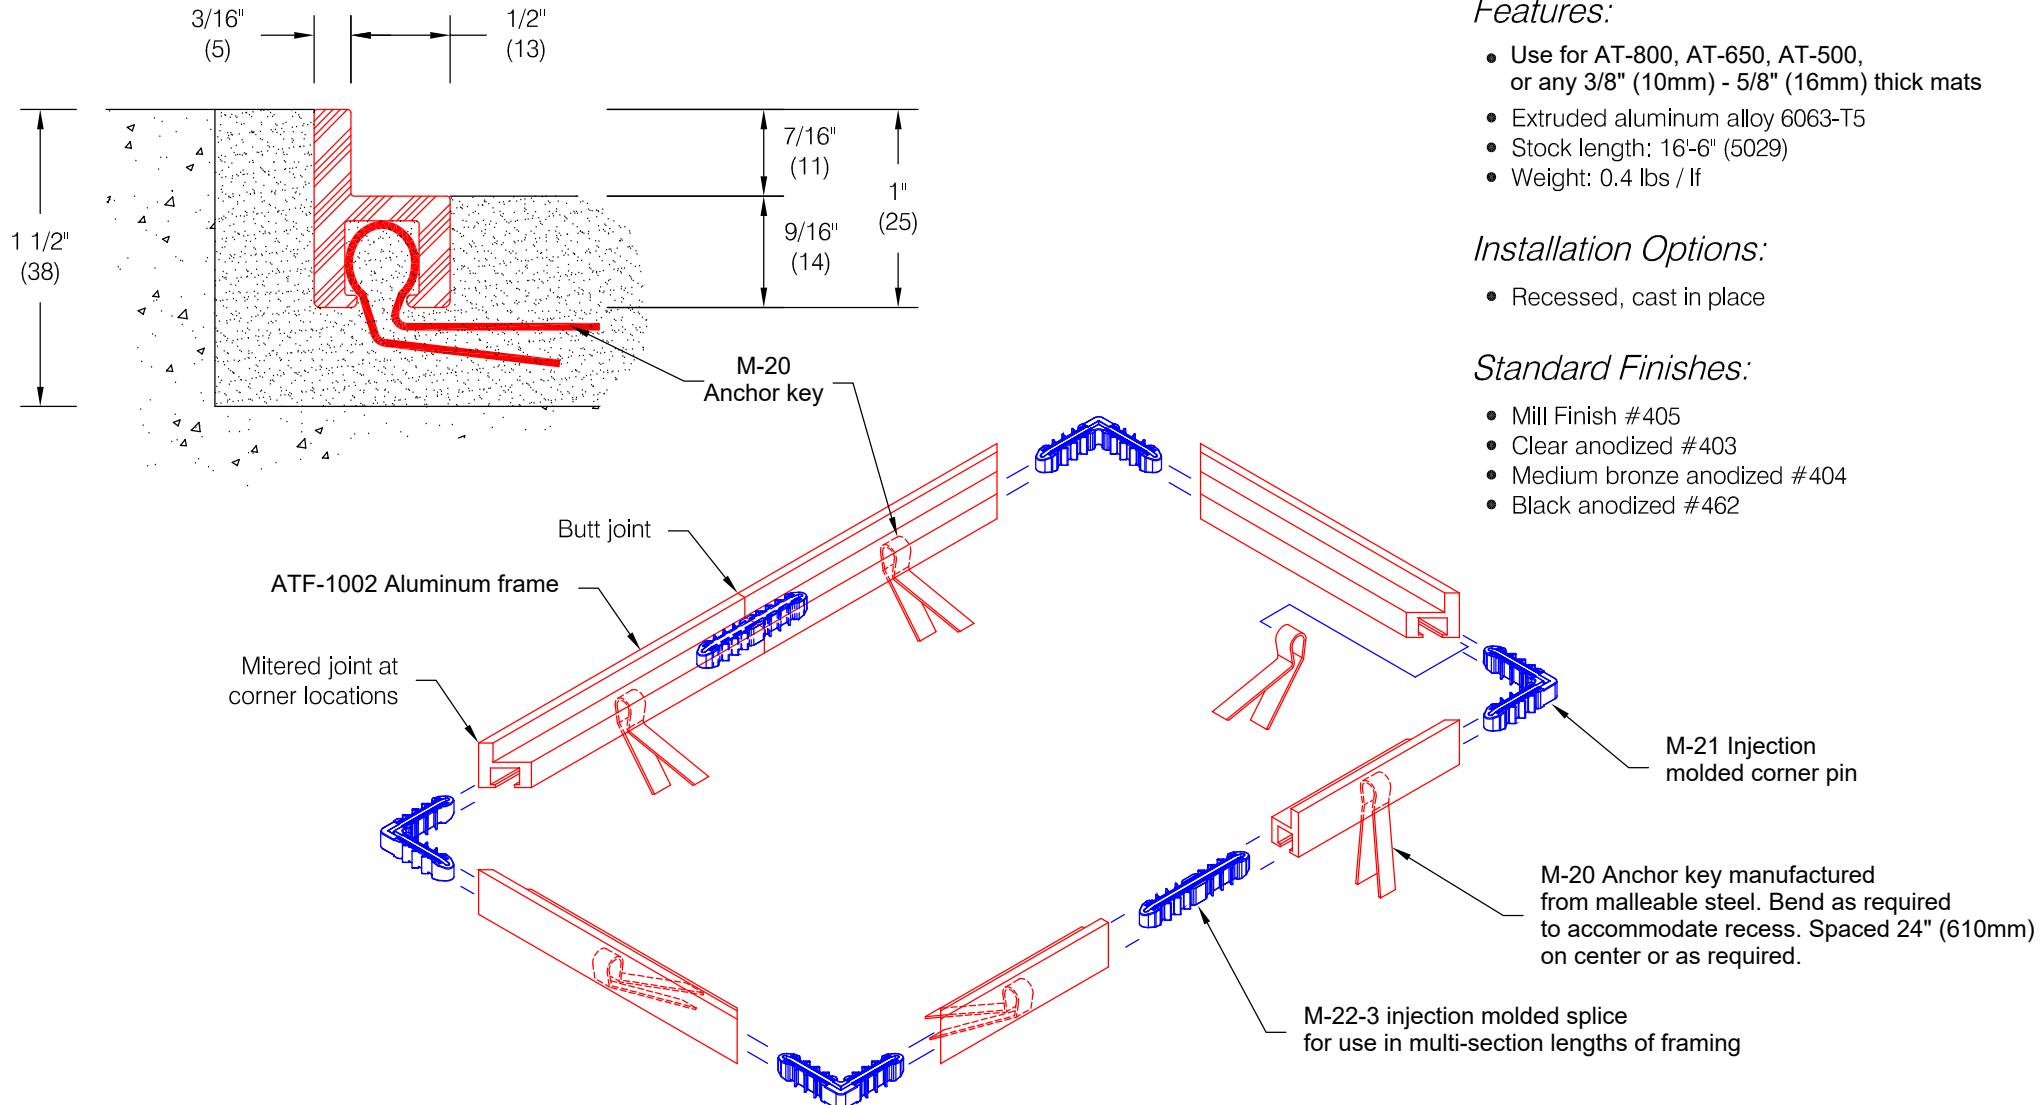

Customer :

Architect :

Project :

Sales Rep :