

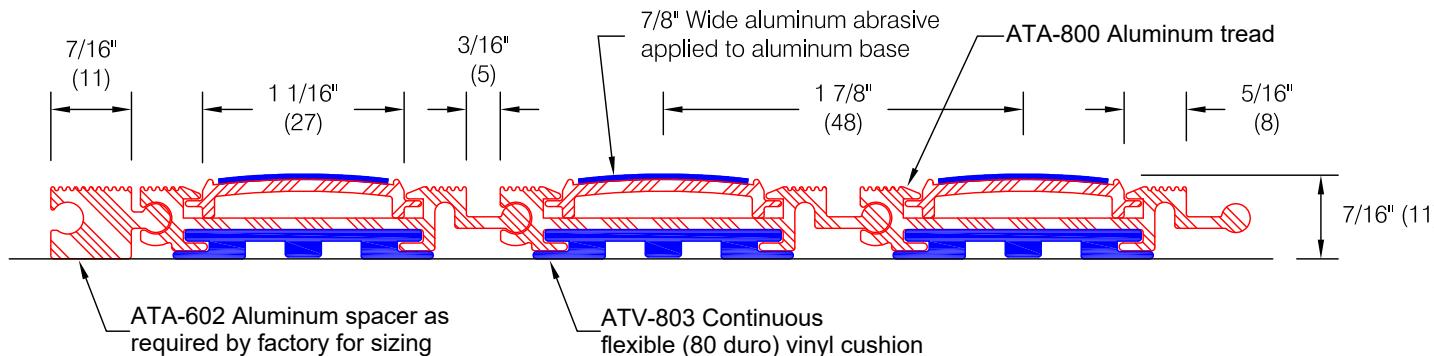


AT-800 - 7/16" Aluminum Recess Mat w/ Aluminum Abrasive Insert

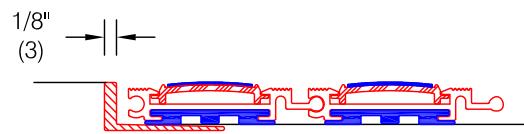


Optional Framing:

* Amaro Products requires that exact opening dimensions be provided. Factory will fabricate mats 1/4" (6) smaller than exact opening dimensions to allow for proper fit on dimensions without nosing.


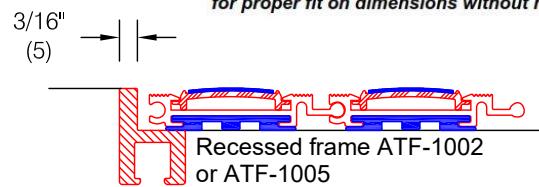


Recessed frame ATF-125

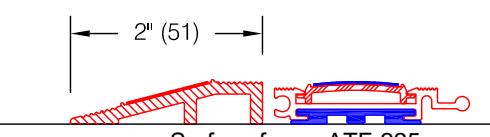

Surface frame ATF-225

Hinge Details:



Optional perforated hinge (solid hinge standard)

Optional Nosings:



Square vinyl nosing



Beveled vinyl nosing


Features:

- Extruded aluminum treads alloy 6063-T52
- Continuous vinyl cushion for superior noise reduction
- Roll-Up for easy cleaning of recess
- Optional perforated hinge for added drainage
- Single section width to 144" (3658)
- Aluminum abrasive insert: Extruded aluminum base with applied abrasive strip
- Static Coefficient of Friction (ASTM D-2047-82)
Dry: > 1.14, Wet: > 1.20

Finishes:

- Aluminum tread and spacer:
Mill finish (standard) #405
Medium bronze anodized #404
Clear anodized #403
Black anodized #462
- Vinyl cushion: Black
- Insert base: Mill finish aluminum #405
- Insert: Mill finish aluminum #405, w/ an applied manufacturer's standard color abrasive strip

Sectioning information:

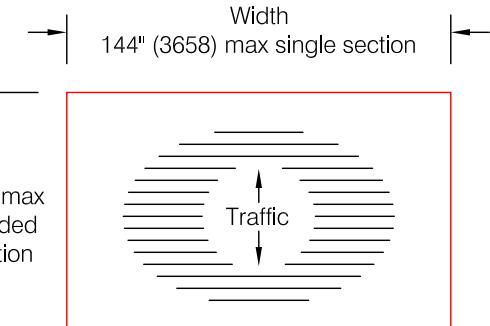

* Mats over 66 square feet may require sectioning as determined by the factory

Amarco Products reserves the right to discontinue a design or modify an existing design without prior notice


Customer :

Architect :




Project :

Sales Rep :

AT-800 - 7/16" Aluminum Recess Mat w/ Bristle Filament Insert


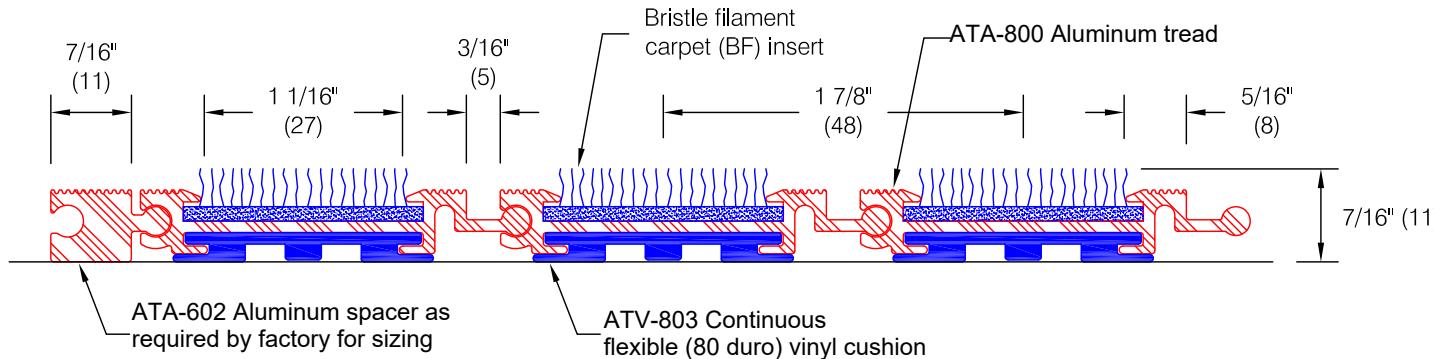


Optional Framing:

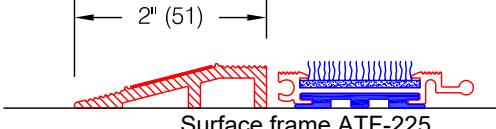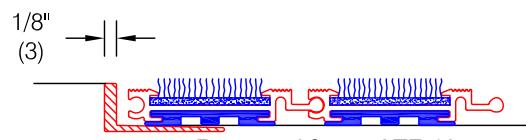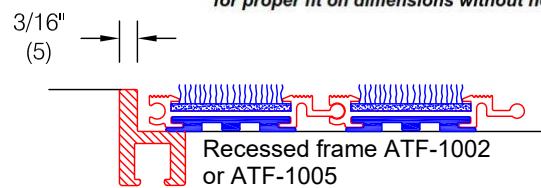

* Amaro Products requires that exact opening dimensions be provided. Factory will fabricate mats 1/4" (6) smaller than exact opening dimensions to allow for proper fit on dimensions without nosing.

Hinge Details:

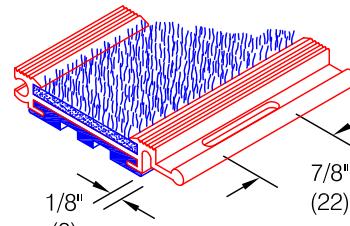

Optional Nosings:



Features:

- Extruded aluminum treads alloy 6063-T52
- Continuous flexible vinyl cushion for superior noise reduction
- Roll-Up for easy cleaning of recess
- Optional perforated hinge for added drainage
- Single section width to 144" (3658)
- Solution dyed polypropylene fibers, 27 oz/sqyd with 50% Blend 600/12-Denier multi-filament and 595/D1 monofilament. Fibers are fusion bonded to continuous two-ply rigid backing.
- Fibers are waterproof with UV inhibitors for exterior use
- Static Coefficient of Friction (ASTM D2047)
Dry: 0.64, Wet: 0.67

Finishes:

- Aluminum tread and spacers:
Mill finish (standard) #405
Medium bronze anodized #404
Clear anodized #403
Black anodized #462
- Vinyl cushion: Black
- Bristle filament carpet insert:
Manufacturer's standard colors

Sectioning information:



* Mats over 66 square feet may require sectioning as determined by the factory

Amarco Products reserves the right to discontinue a design or modify an existing design without prior notice


Customer :

Architect :


Project :

Sales Rep :


AT-800 - 7/16" Aluminum Recess Mat w/ Corrugated Aluminum Insert

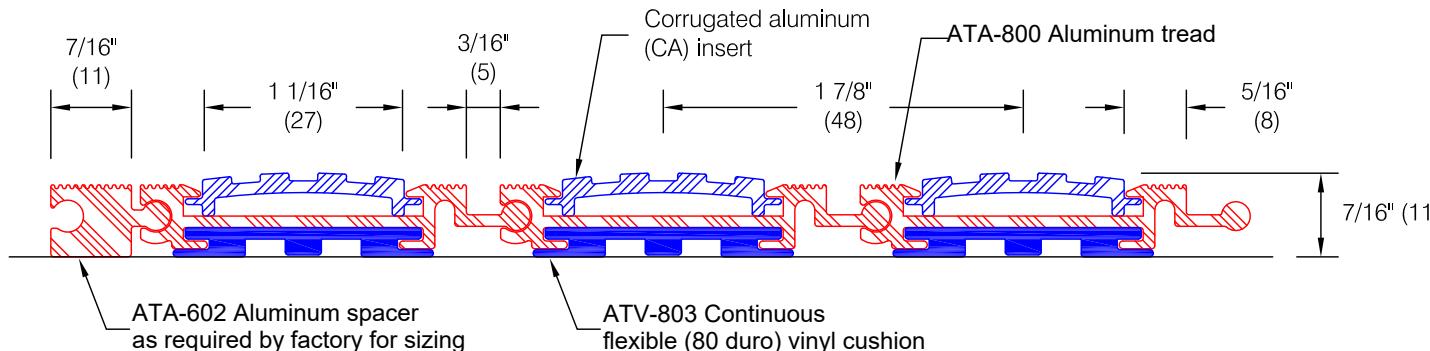


Optional Framing:

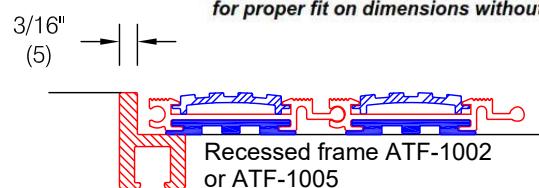

* Amaro Products requires that exact opening dimensions be provided. Factory will fabricate mats 1/4" (6) smaller than exact opening dimensions to allow for proper fit on dimensions without nosing.

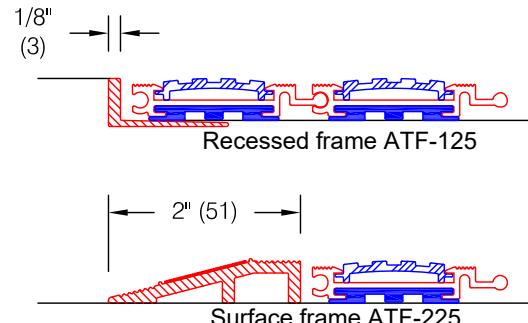


Recessed frame ATF-125

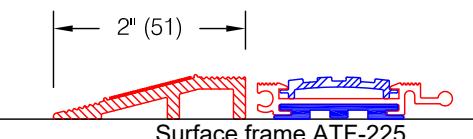


Surface frame ATF-225

Hinge Details:



Ball & Socket Hinge



Optional perforated hinge (solid hinge standard)

Optional Nosings:



Square vinyl nosing



Beveled vinyl nosing


Features:

- Extruded aluminum treads alloy 6063-T52
- Continuous vinyl cushion for superior noise reduction
- Roll-Up for easy cleaning of recess
- Optional perforated hinge for added drainage
- Single section width to 144" (3658)
- Static Coefficient of Friction (ASTM D-2047-82)
 - Dry: 0.61
 - Wet: 0.92

Finishes:

- Aluminum tread and spacer:
 - Mill finish (standard) #405
 - Medium bronze anodized #404
 - Clear anodized #403
 - Black anodized #462
- Vinyl cushion: Black
- Corrugated aluminum insert alloy 6105-T5:
 - Mill finish (standard) #405

Sectioning information:

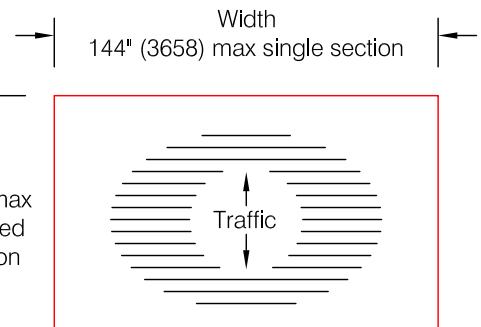

* Mats over 66 square feet may require sectioning as determined by the factory

Amarco Products reserves the right to discontinue a design or modify an existing design without prior notice


Customer :

Architect :


Project :

Sales Rep :


AT-800 - 7/16" Aluminum Recess Mat w/ Maxi-Tuft Insert

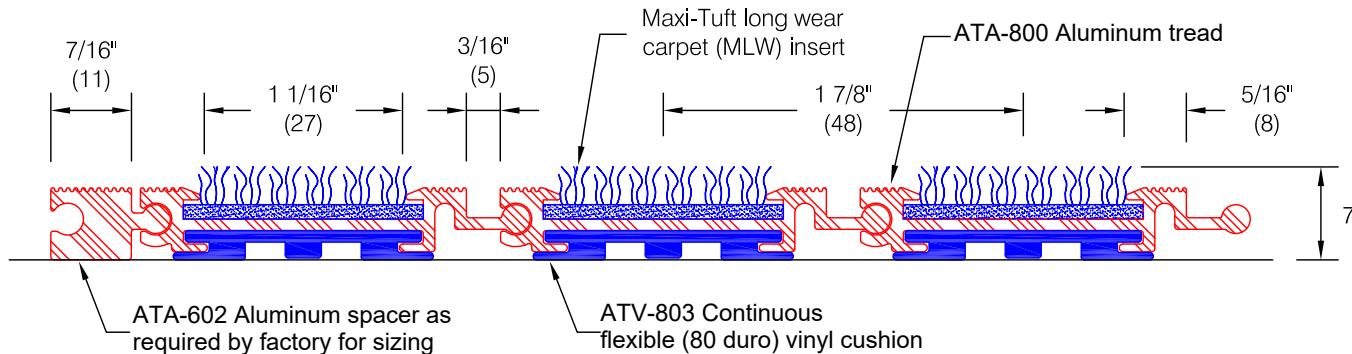

Optional Framing:

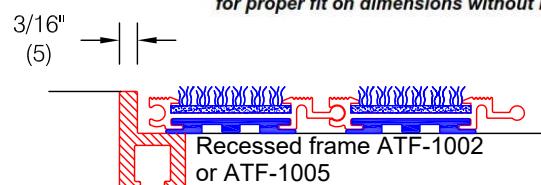

* Amaro Products requires that exact opening dimensions be provided. Factory will fabricate mats 1/4" (6) smaller than exact opening dimensions to allow for proper fit on dimensions without nosing.

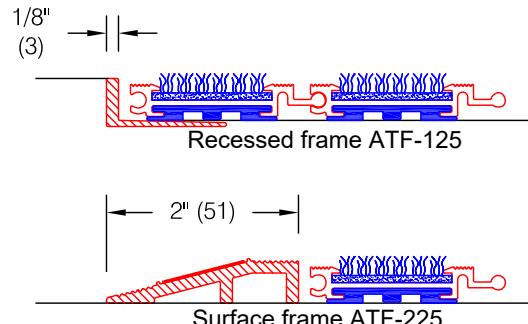



Customer :

Project :

Architect :

Sales Rep :

Hinge Details:



1/8" (3)
7/8" (22)

Optional perforated hinge (solid hinge standard)

Optional Nosings:



Square vinyl nosing



Beveled vinyl nosing


Features:

- Extruded aluminum treads alloy 6063-T52
- Continuous vinyl cushion for superior noise reduction
- Roll-Up for easy cleaning of recess
- Optional perforated hinge for added drainage
- Single section width to 144" (3658)
- Space dyed, 100% polyamide nylon, tetra-lobal fibers, 5/32 (4) pile height, 30 oz/sq yd
- Static Coefficient of Friction (ASTM D-2047-82)
Dry: 0.49, Wet: 0.77

Finishes:


- Aluminum tread and spacer:
Mill finish (standard) #405
Medium bronze anodized #404
Clear anodized #403
Black anodized #462
- Vinyl cushion: Black
- Maxi-Tuft long wear carpet insert:
Manufacturer's standard colors

Sectioning information:

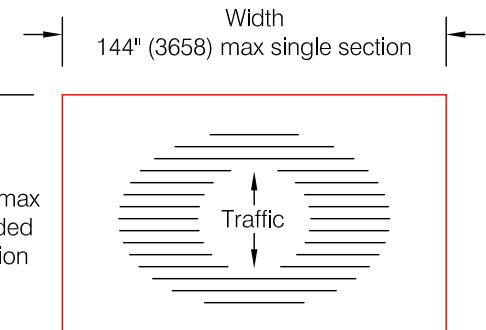


* Mats over 66 square feet may require sectioning as determined by the factory


AT-800 - 7/16" Aluminum Recess Mat w/ Rigid Corrugated Vinyl Insert

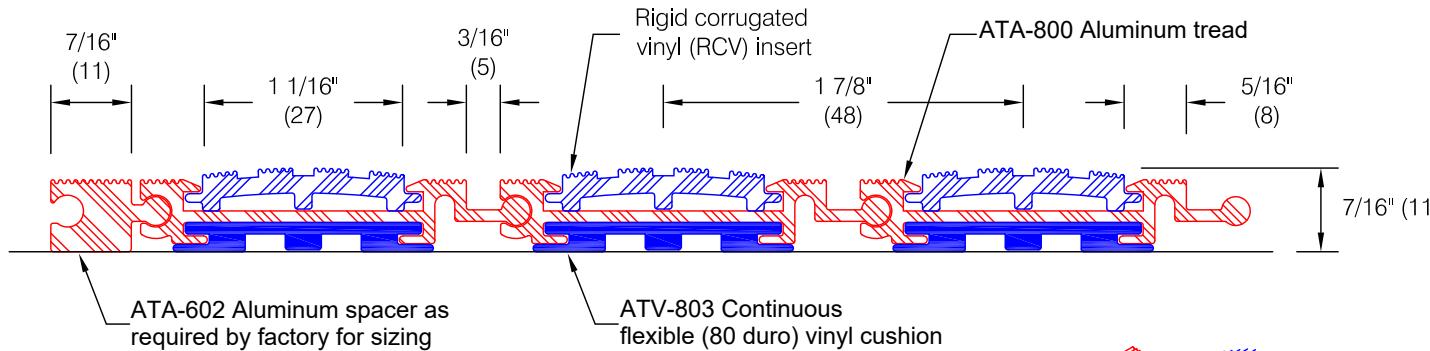


Optional Framing:

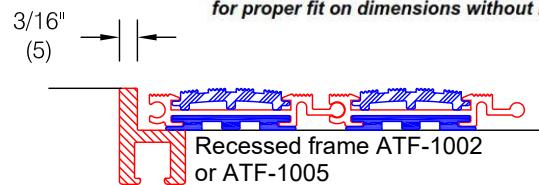

* Amaro Products requires that exact opening dimensions be provided. Factory will fabricate mats 1/4" (6) smaller than exact opening dimensions to allow for proper fit on dimensions without nosing.

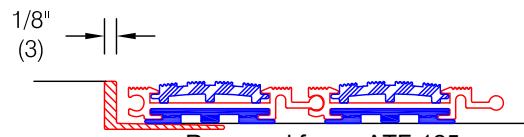

Recessed frame ATF-125

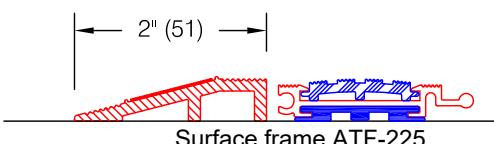


Surface frame ATF-225

Hinge Details:



Ball & Socket Hinge

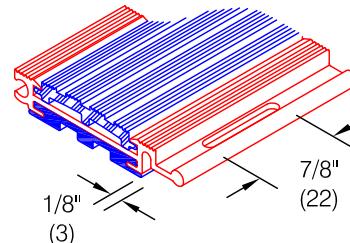

Optional perforated hinge (solid hinge standard)

Optional Nosings:



Square vinyl nosing



Beveled vinyl nosing


Features:

- Extruded aluminum treads alloy 6063-T52
- Continuous vinyl cushion for superior noise reduction
- Roll-Up for easy cleaning of recess
- Optional perforated hinge for added drainage
- Single section width to 144" (3658)
- Rigid corrugated vinyl insert (colorable)

Finishes:

- Aluminum tread and spacer:
 - Mill finish (standard) #405
 - Medium bronze anodized #404
 - Clear anodized #403
 - Black anodized #462
- Vinyl cushion: Black
- Rigid corrugated vinyl insert:
 - Manufacturer's standard colors

Sectioning information:

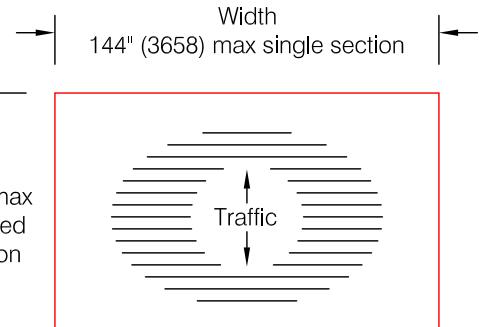

* Mats over 66 square feet may require sectioning as determined by the factory

Amarco Products reserves the right to discontinue a design or modify an existing design without prior notice


Customer :

Architect :

Project :


Sales Rep :

AT-800 - 7/16" Aluminum Recess Mat w/ Nylon Carpet insert

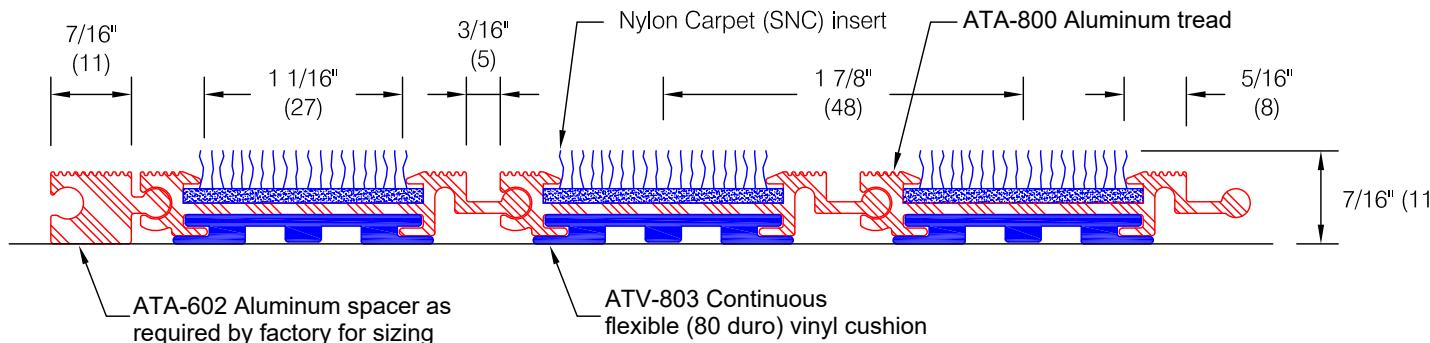


Optional Framing:


* Amaro Products requires that exact opening dimensions be provided. Factory will fabricate mats 1/4" (6) smaller than exact opening dimensions to allow for proper fit on dimensions without nosing.

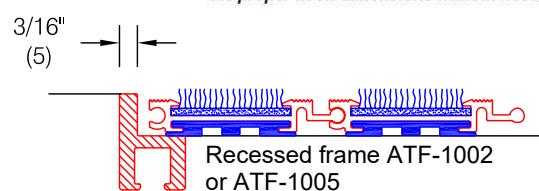

Recessed frame ATF-1002 or ATF-1005

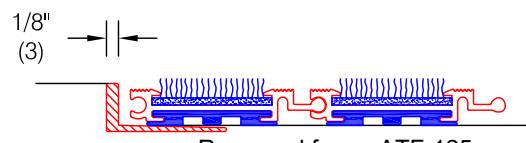


Recessed frame ATF-125

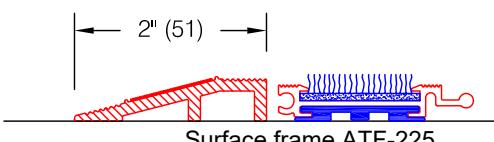


Surface frame ATF-225

Hinge Details:



Ball & Socket Hinge



Optional perforated hinge (solid hinge standard)

Optional Nosings:



Square vinyl nosing



Beveled vinyl nosing


Features:

- Extruded aluminum treads alloy 6063-T52
- Continuous vinyl cushion for superior noise reduction
- Roll-Up for easy cleaning of recess
- Optional perforated hinge for added drainage
- Single section width to 144" (3658)
- 100% solution dyed nylon fiber with 1/4" (6) finish pile height, 33.8 oz/sq yd in rigid backing
- Static Coefficient of Friction (ASTM D-2047-82)
Dry: 0.48, Wet: 0.67

Finishes:

- Aluminum tread and spacer:
Mill finish (standard) #405
Medium bronze anodized #404
Clear anodized #403
Black anodized #462
- Vinyl cushion: Black
- Rigid-Back Nylon carpet insert:
Manufacturer's standard colors

Sectioning information:

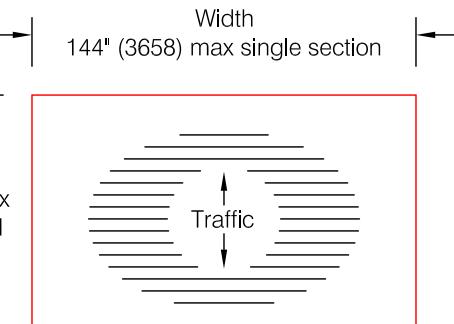

* Mats over 66 square feet may require sectioning as determined by the factory

Amarco Products reserves the right to discontinue a design or modify an existing design without prior notice

Customer :


Architect :

Project :

Sales Rep :

Entrance Mats & Gratings

ATF-125 Aluminum Frame

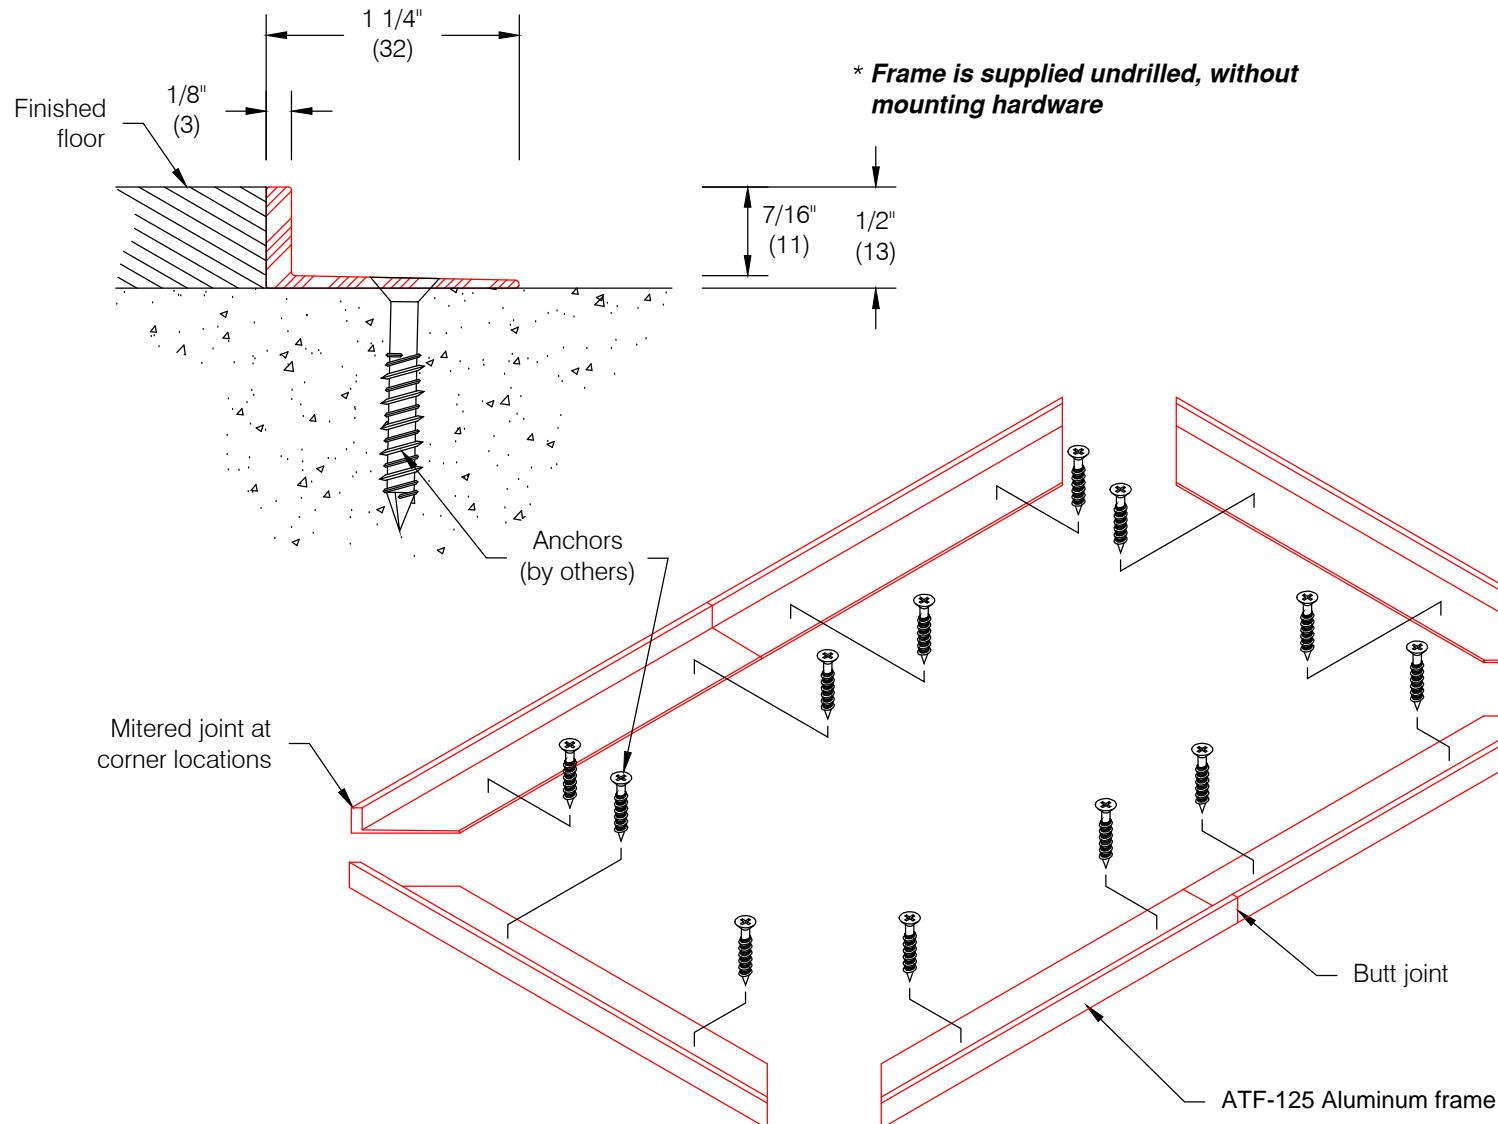

Features:

- Use for AT-800, AT-650, AT-500, or any 3/8" (10mm) - 5/8" (16mm) thick mats
- Extruded aluminum alloy 6063-T5
- Stock length: 12'-3" (3734mm)
- Weight: 0.15 lbs / lf

Installation Options:


- Surface mounted, mechanically fastened
- Recessed, mechanically fastened
- Mounting hardware spaced at 18" (457mm) on center or as required

Standard Finishes:

- Mill Finish #405
- Clear anodized #403
- Medium bronze anodized #404
- Black anodized #462

Entrance Mats & Gratings

ATF-1002 Aluminum Recessed Frame

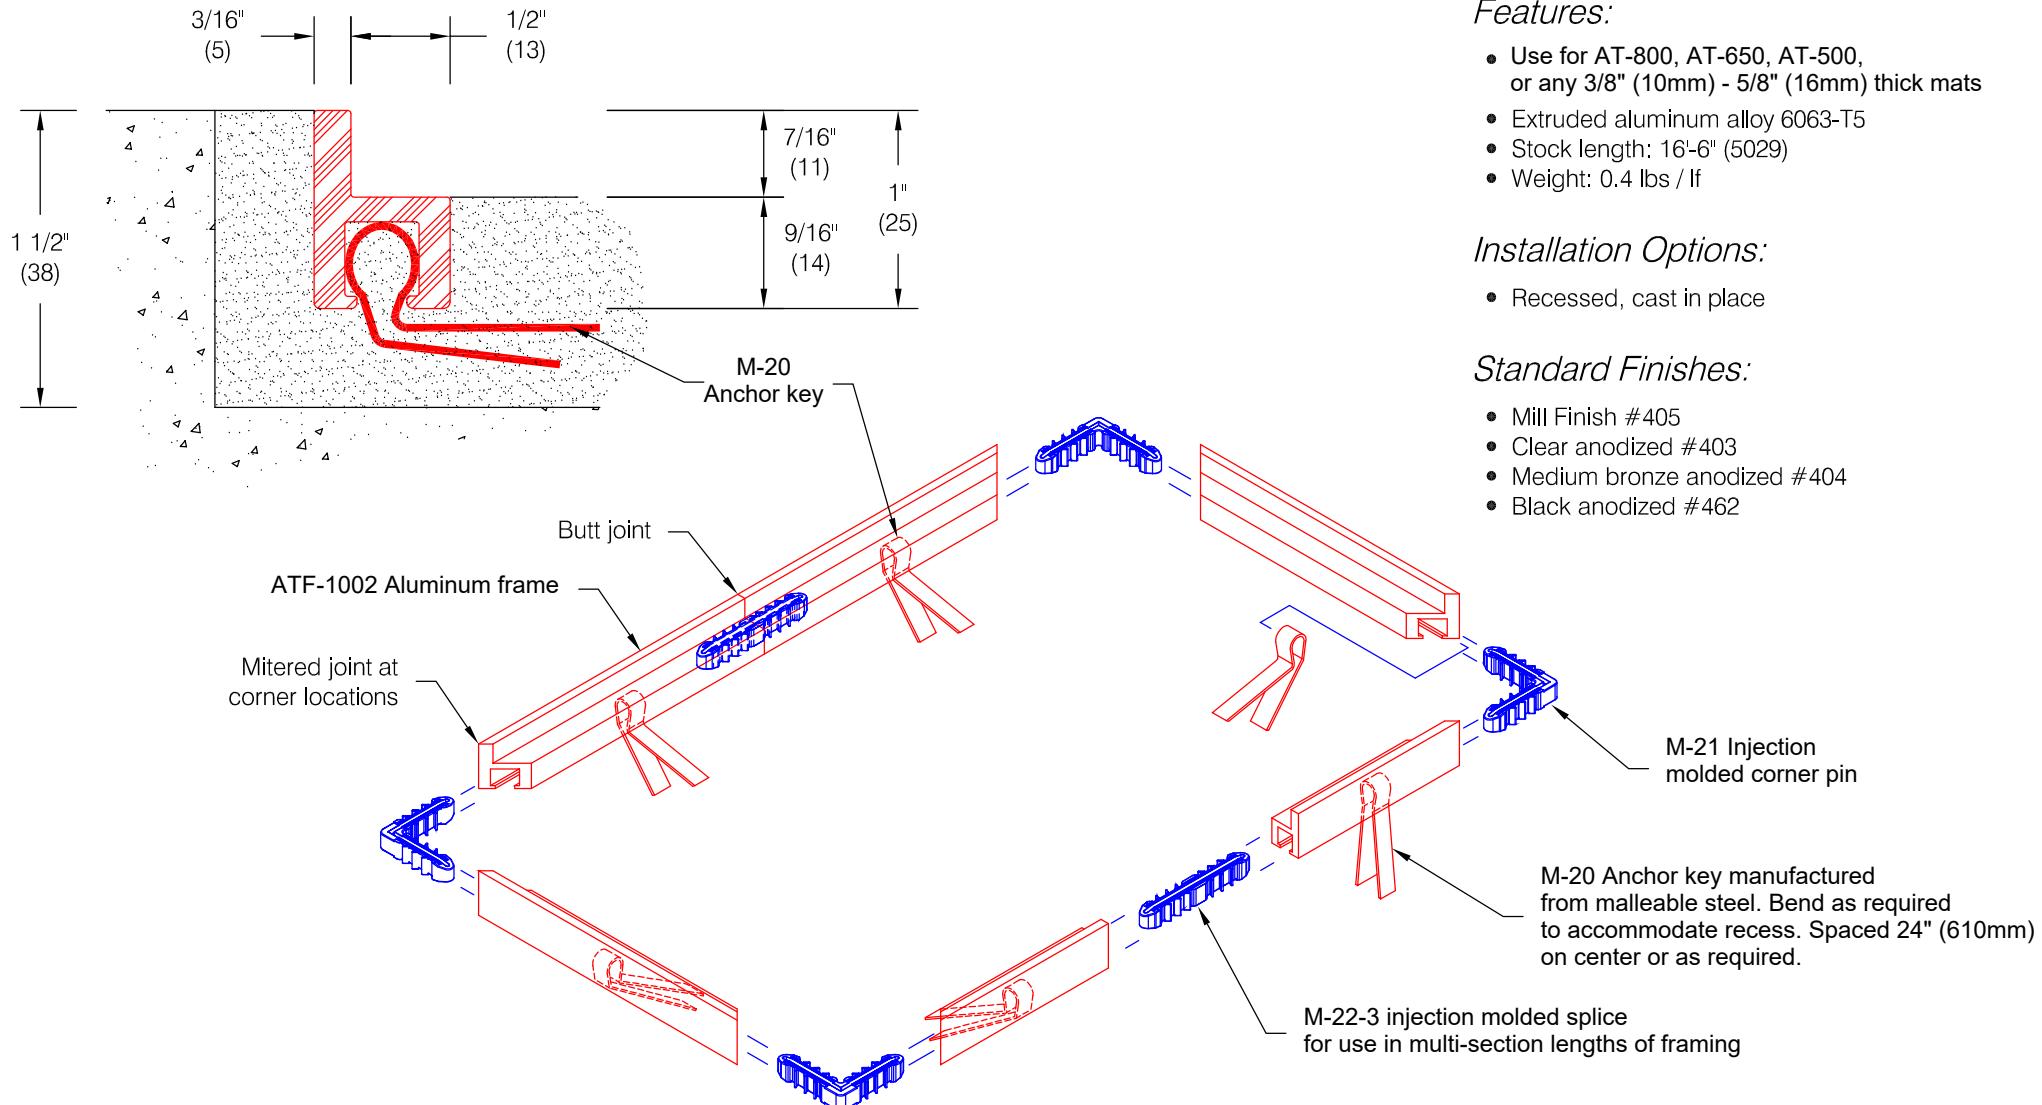

Customer :

Architect :

Project :

Sales Rep :