




G-1532 - 15/32" Buffed Tire Grating

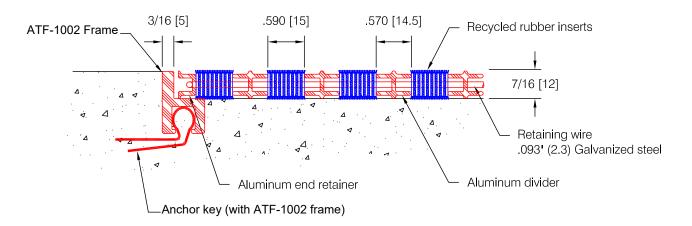


* Note On Dimensions:

Amarco Products requires that exact opening dimensions be provided. Factory will fabricate mats 1/4" (6) smaller than exact opening dimensions to allow for proper fit on dimensions without nosing.





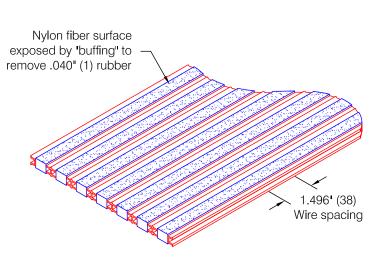

"CS" : Closed Construction, Single Insert

Features:


- Inserts: Recycled content 100% post-consumer
- Reversible for extended life
- Weight: 2.6 lbs/sqft

Finishes:

- Aluminum profiles: Mill finish (standard) #405 Clear anodized #403
- Insert: Natural Gray #17
- Wire: Cold galvaized, 30-35 micron


Construction:

- Closed construction and single insert. Dirt and debris remain on surface for cleaning
- Manufacturing process prevents exact alignment of aluminum profiles and rubber inserts between adjacent sections



Width |← 96" [2438] max single section ←|






* Mats over 16 square feet may require sectioning as determined by the factory

Customer :	Project :	
Architect :	Sales Rep :	



G-1532 - 15/32" Buffed Tire Grating

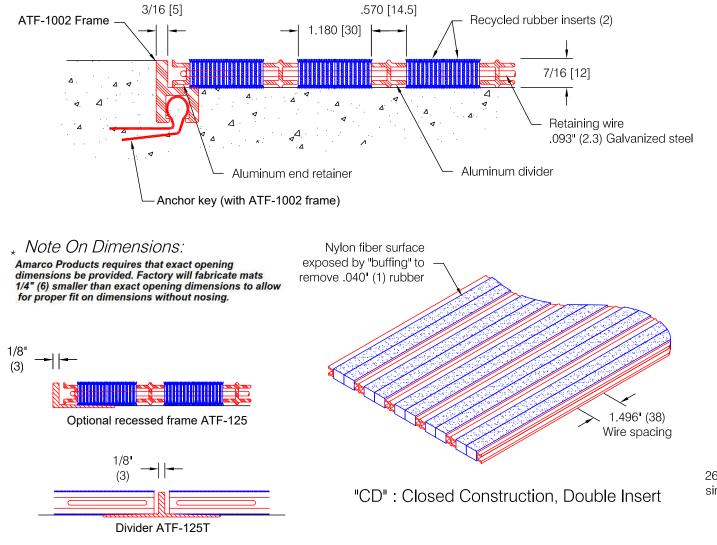

Features:

- Inserts: Recycled content 100% post-consumer
- Reversible for extended life
- Weight: 2.66 lbs/sqft

Finishes:

- Aluminum profiles: Mill finish (standard) #405 Clear anodized #403
- Insert: Natural Gray #17
- Wire: Cold galvaized, 30-35 micron

Construction:

- Closed construction and double insert. Dirt and debris remain on surface for cleaning
- Manufacturing process prevents exact alignment of aluminum profiles and rubber inserts between adjacent sections

Sectioning information:

Width |← 96" [2438] max single section →





* Mats over 16 square feet may require sectioning as determined by the factory

Amarco Products reserves the right to discontinue a design or modify an existing design without prior notice

Customer :	Project :	
Architect :	Sales Rep :	