

**Features:**


- Extruded bronze treads, 1/8" (3), alloy 385, mill finish
- Molded polyethylene spacer to reduce clatter and eliminate metal contact with floor
- Single section width to 96" (2438)
- Static Coefficient of Friction (ASTM D-2047-82)  
Dry: 0.45, Wet: 0.74

**Finishes:**


- Solid bronze tread:  
Mill finish (standard) #405  
Satin finish #444
- Spacer:  
Molded polyethylene white #10

**Note On Dimensions:**

\* Amarco Products requires that exact opening dimensions be provided. Factory will fabricate mats 1/4" (6) smaller than exact opening dimensions to allow for proper fit on dimensions without nosing.

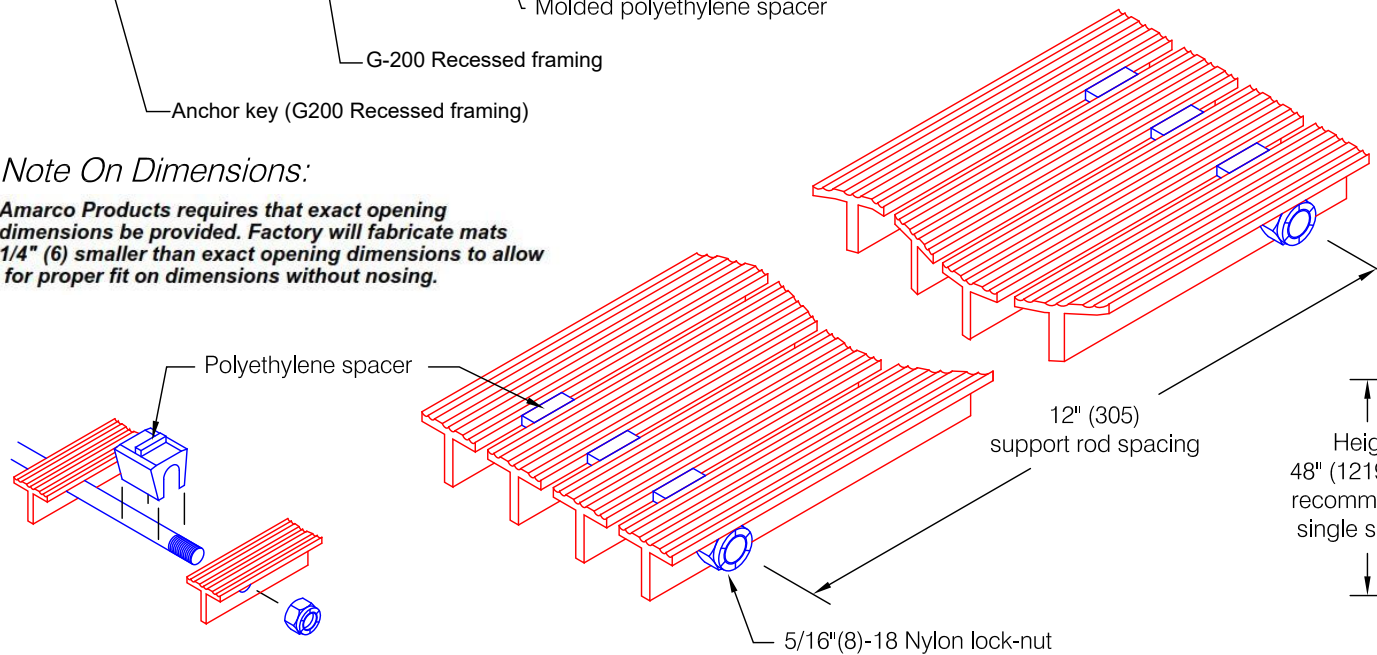

**Sectioning information:**

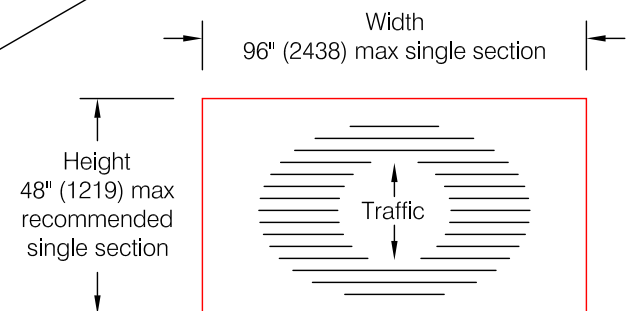

\* Mats over 28 square feet may require sectioning as determined by the factory

Amarco Products reserves the right to discontinue a design or modify an existing design without prior notice

Customer :	Project :	
Architect :	Sales Rep :	