


AT-250 AL-TRACK

Nylon Carpet Insert

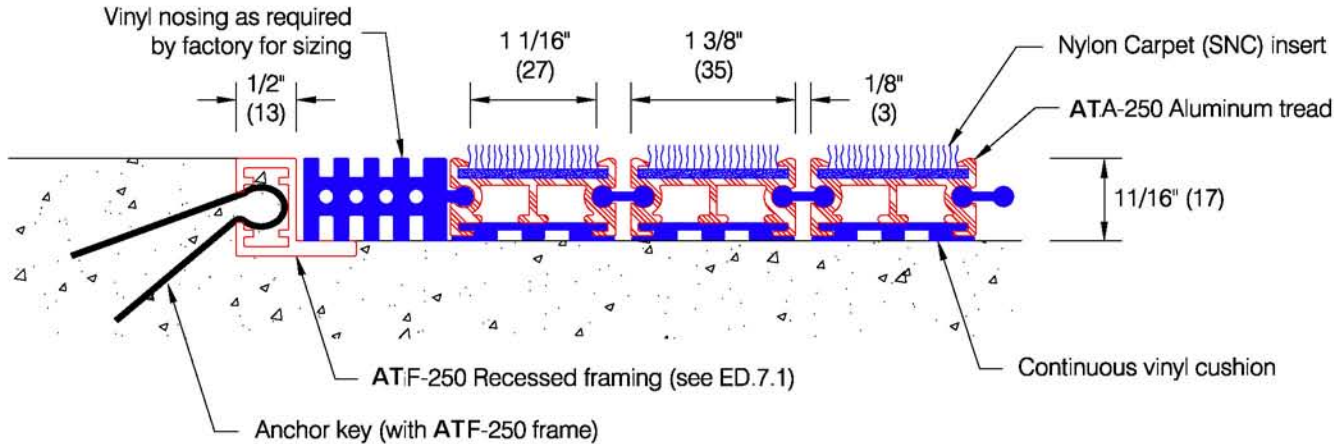

Features:

- Extruded aluminum treads alloy 6105-T5
- Continuous vinyl cushion for superior noise reduction
- 11/16" (17) deep for increased drainage ability
- Roll-Up for easy cleaning of recess
- Perforated hinge for added drainage
- Single section width to 144" (3568)
- 100% solution dyed nylon fiber with 1/4" (6) finish pile height, 33.8 oz/sq yd in rigid backing
- Static Coefficient of Friction (ASTM D-2047-82)
Dry: 0.48, Wet: 0.67


Finishes:

- Aluminum tread:
 - Mill finish (standard) #405
 - Medium bronze anodized #404
 - Clear anodized #403
 - Black anodized #462
- Rigid-Back Nylon carpet insert:
 - Select from manufacturer's color samples


Optional Framing:

Note On Dimensions:


* Amarco requires that exact mat opening dimensions be provided. Factory will fabricate mats 1/4" (6) smaller than exact opening dimensions to allow for proper fit.

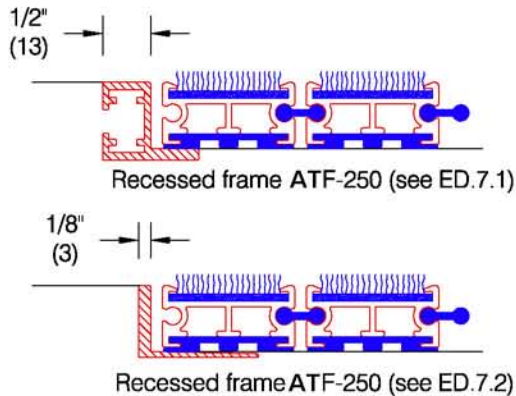

Hinge Detail:

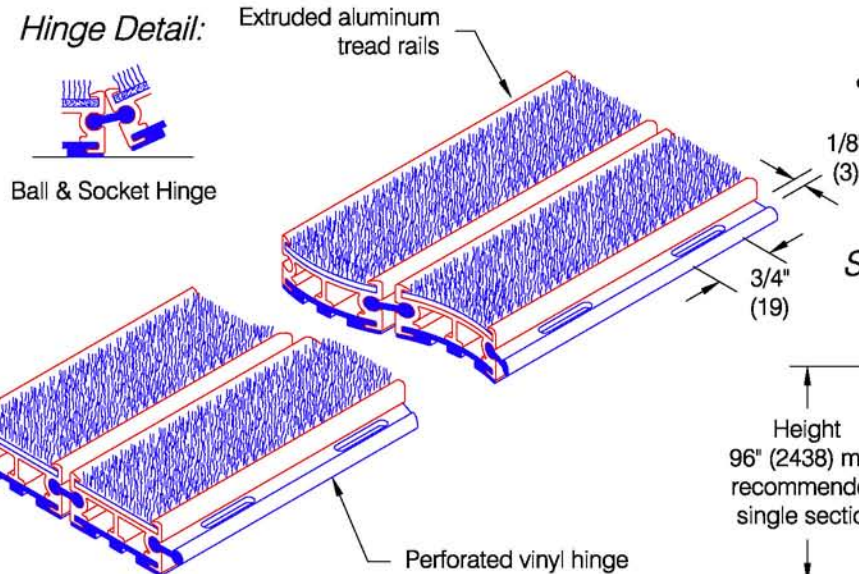

Sectioning information:

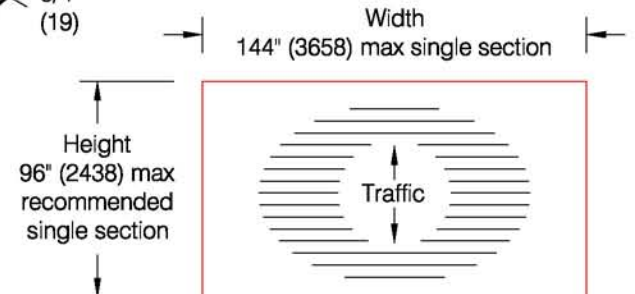

* Mats over 48 square feet may require sectioning as determined by the factory

Amarco reserves the right to discontinue a design or modify an existing design without prior notice

Customer :	Project :	ED.35.1b
Architect :	Sales Rep :	