


AMARCO

American Mat & Rubber Company

ENTRANCE MATS & GRATINGS

AT-650 AL-TRACK

Aluminum Abrasive Insert

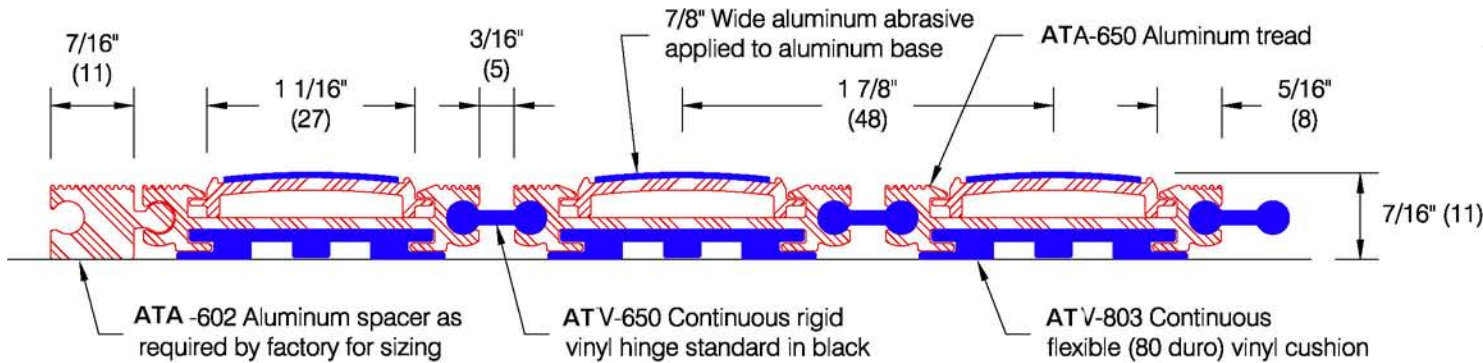


Features:


- Extruded aluminum treads alloy 6063-T6
- Continuous vinyl hinge and cushion for superior noise reduction
- Roll-Up for easy cleaning of recess
- Perforated hinge for added drainage
- Single section width to 144" (3658)
- Aluminum abrasive insert: Extruded aluminum base with applied abrasive strip
- Static Coefficient of Friction (ASTM D-2047-82)
Dry: > 1.14, Wet: > 1.20

Optional Framing:


*** Amarco requires that exact opening dimensions be provided. Factory will fabricate mats 1/4" (6) smaller than exact opening dimensions to allow for proper fit.**

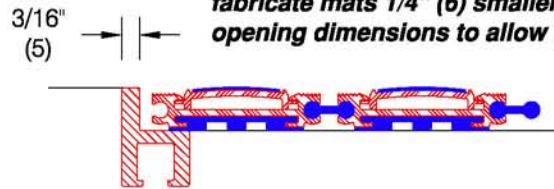

Recessed frame ATF-1002 (see ED.1.0) or ATF-1005 (see ED.2.0)

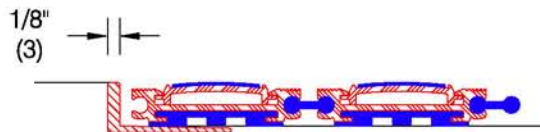


Recessed frame ATF-125 (see ED.3.0)

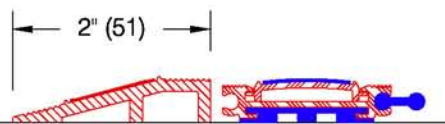


Surface frame ATF-225 (see ED.4.0)

Hinge Details:

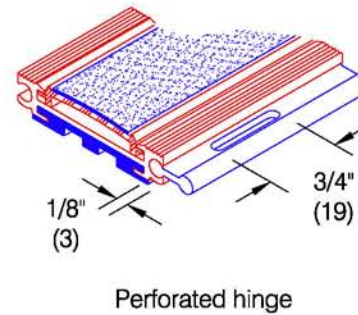


Optional Nosings:



Finishes:

- Aluminum tread and spacer:
Mill finish (standard) #405
Medium bronze anodized #404
Clear anodized #403
Black anodized #462
- Vinyl cushion and hinge: Black
- Insert base: Mill finish aluminum #405
- Insert: Mill finish aluminum #405, w/ an applied manufacturer's standard color abrasive strip

Sectioning information:

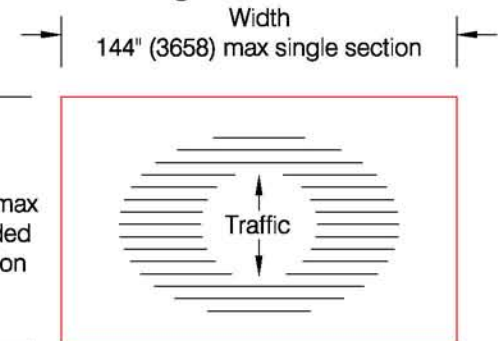

*** Mats over 66 square feet may require sectioning as determined by the factory**

Amarco reserves the right to discontinue a design or modify an existing design without prior notice

Customer :

Project :

Architect :

Sales Rep :

ED.13.5b