

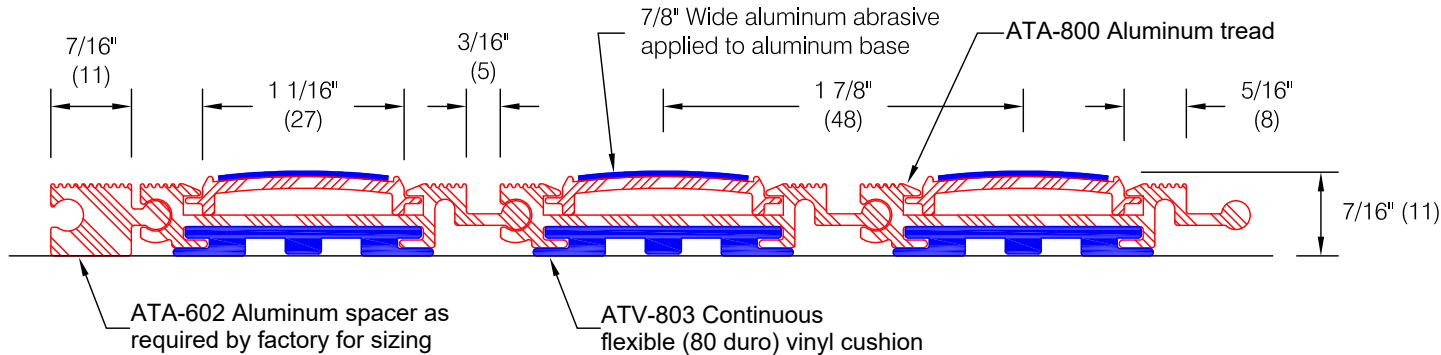



AT-800 - 7/16" Aluminum Recess Mat w/ Aluminum Abrasive Insert


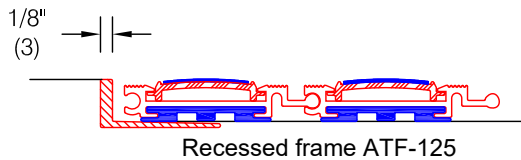


Optional Framing:

* Amarco Products requires that exact opening dimensions be provided. Factory will fabricate mats 1/4" (6) smaller than exact opening dimensions to allow for proper fit on dimensions without nosing.

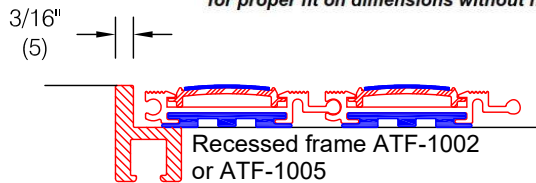

Hinge Details:

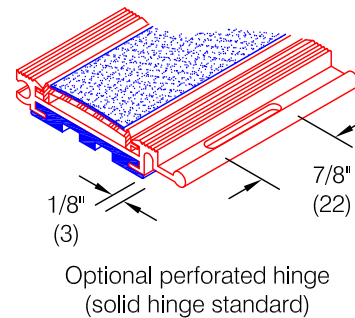

Optional Nosings:




Features:

- Extruded aluminum treads alloy 6063-T52
- Continuous vinyl cushion for superior noise reduction
- Roll-Up for easy cleaning of recess
- Optional perforated hinge for added drainage
- Single section width to 144" (3658)
- Aluminum abrasive insert: Extruded aluminum base with applied abrasive strip
- Static Coefficient of Friction (ASTM D-2047-82)
Dry: > 1.14, Wet: > 1.20

Finishes:

- Aluminum tread and spacer:
Mill finish (standard) #405
Medium bronze anodized #404
Clear anodized #403
Black anodized #462
- Vinyl cushion: Black
- Insert base: Mill finish aluminum #405
- Insert: Mill finish aluminum #405, w/ an applied manufacturer's standard color abrasive strip

Sectioning information:

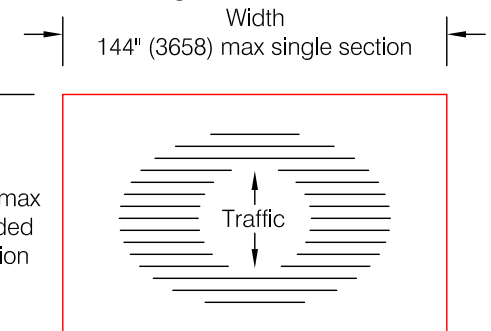


* Mats over 66 square feet may require sectioning as determined by the factory

Amarco Products reserves the right to discontinue a design or modify an existing design without prior notice




| | | |
|-------------|-------------|--|
| Customer : | Project : | |
| Architect : | Sales Rep : | |

AT-800 - 7/16" Aluminum Recess Mat w/ Bristle Filament Insert


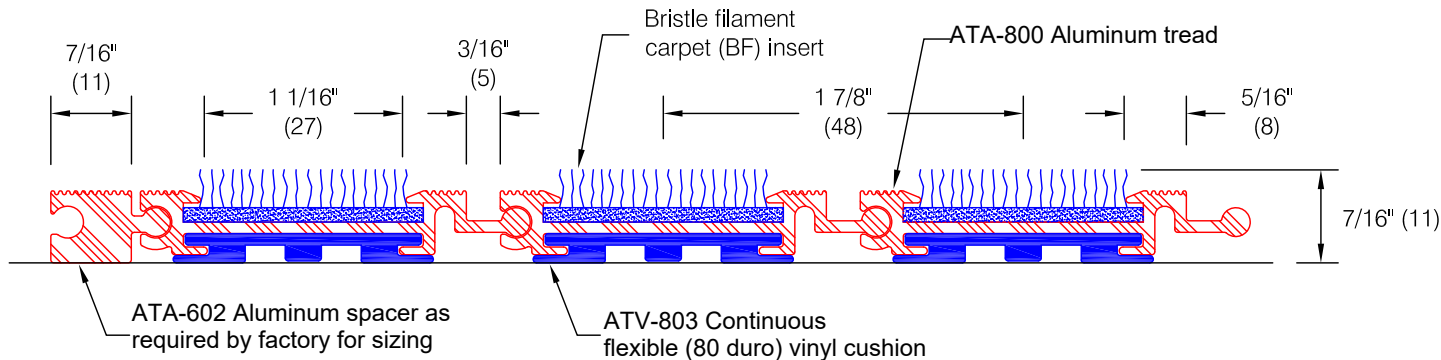


Optional Framing:


* Amarco Products requires that exact opening dimensions be provided. Factory will fabricate mats 1/4" (6) smaller than exact opening dimensions to allow for proper fit on dimensions without nosing.

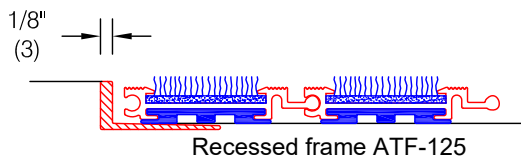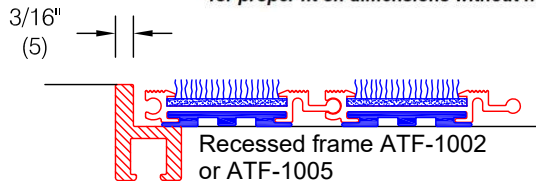

Hinge Details:

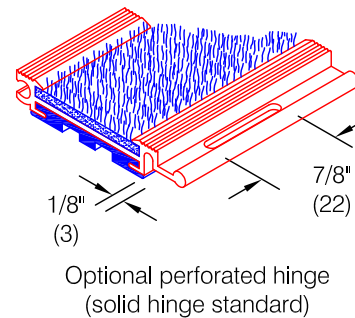

Optional Nosings:




Features:

- Extruded aluminum treads alloy 6063-T52
- Continuous flexible vinyl cushion for superior noise reduction
- Roll-Up for easy cleaning of recess
- Optional perforated hinge for added drainage
- Single section width to 144" (3658)
- Solution dyed polypropylene fibers, 27 oz/sqyd with 50% Blend 600/12-Denier multi-filament and 595/D1 monofilament. Fibers are fusion bonded to continuous two-ply rigid backing.
- Fibers are waterproof with UV inhibitors for exterior use
- Static Coefficient of Friction (ASTM D2047) Dry: 0.64, Wet: 0.67

Finishes:

- Aluminum tread and spacers: Mill finish (standard) #405 Medium bronze anodized #404 Clear anodized #403 Black anodized #462
- Vinyl cushion: Black
- Bristle filament carpet insert: Manufacturer's standard colors

Sectioning information:

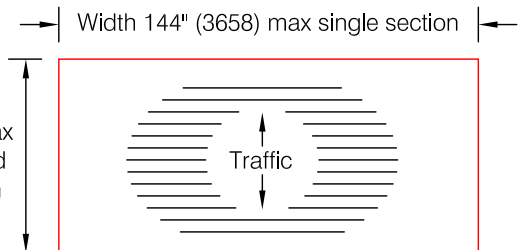


* Mats over 66 square feet may require sectioning as determined by the factory

Amarco Products reserves the right to discontinue a design or modify an existing design without prior notice

| | | |
|-------------|-------------|--|
| Customer : | Project : | |
| Architect : | Sales Rep : | |

AT-800 - 7/16" Aluminum Recess Mat w/ Corrugated Aluminum Insert



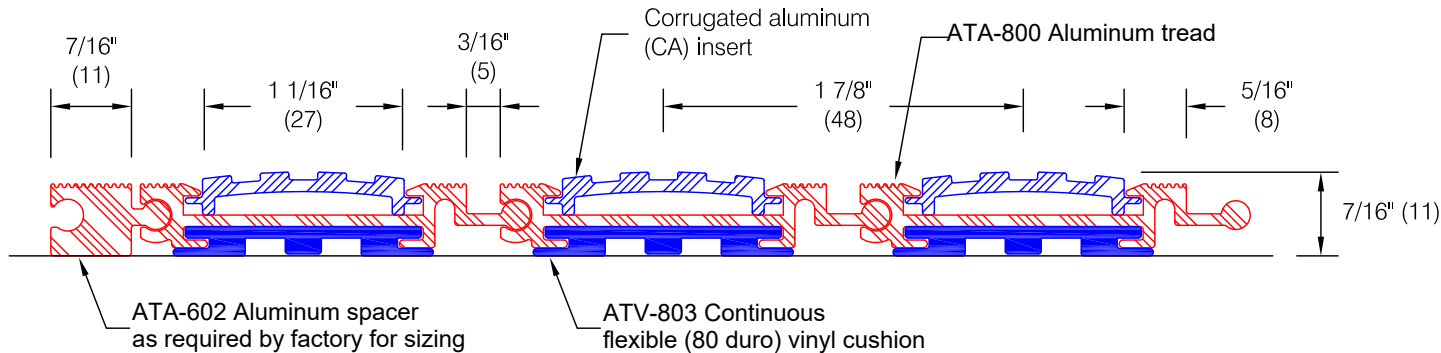


Features:



- Extruded aluminum treads alloy 6063-T52
- Continuous vinyl cushion for superior noise reduction
- Roll-Up for easy cleaning of recess
- Optional perforated hinge for added drainage
- Single section width to 144" (3658)
- Static Coefficient of Friction (ASTM D-2047-82)
 - Dry: 0.61
 - Wet: 0.92

Optional Framing:

* Amarco Products requires that exact opening dimensions be provided. Factory will fabricate mats 1/4" (6) smaller than exact opening dimensions to allow for proper fit on dimensions without nosing.

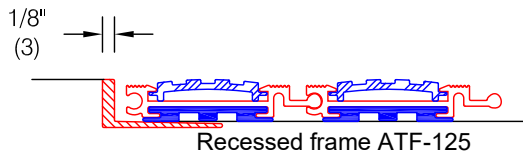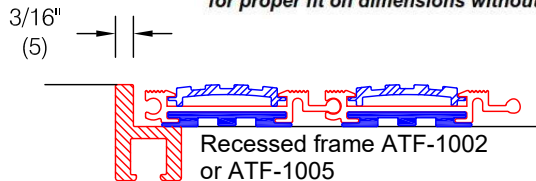

Hinge Details:




Optional Nosings:



Finishes:

- Aluminum tread and spacer:
 - Mill finish (standard) #405
 - Medium bronze anodized #404
 - Clear anodized #403
 - Black anodized #462
- Vinyl cushion: Black
- Corrugated aluminum insert alloy 6105-T5:
 - Mill finish (standard) #405

Sectioning information:

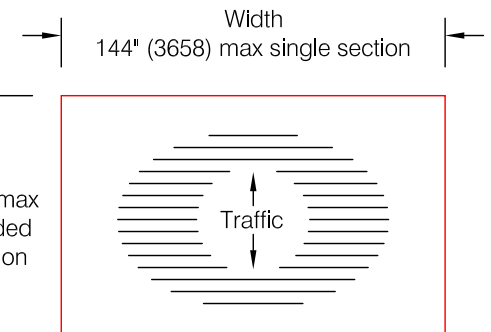


* Mats over 66 square feet may require sectioning as determined by the factory

Amarco Products reserves the right to discontinue a design or modify an existing design without prior notice

| | | |
|-------------|-------------|--|
| Customer : | Project : | |
| Architect : | Sales Rep : | |

AT-800 - 7/16" Aluminum Recess Mat w/ Maxi-Tuft Insert

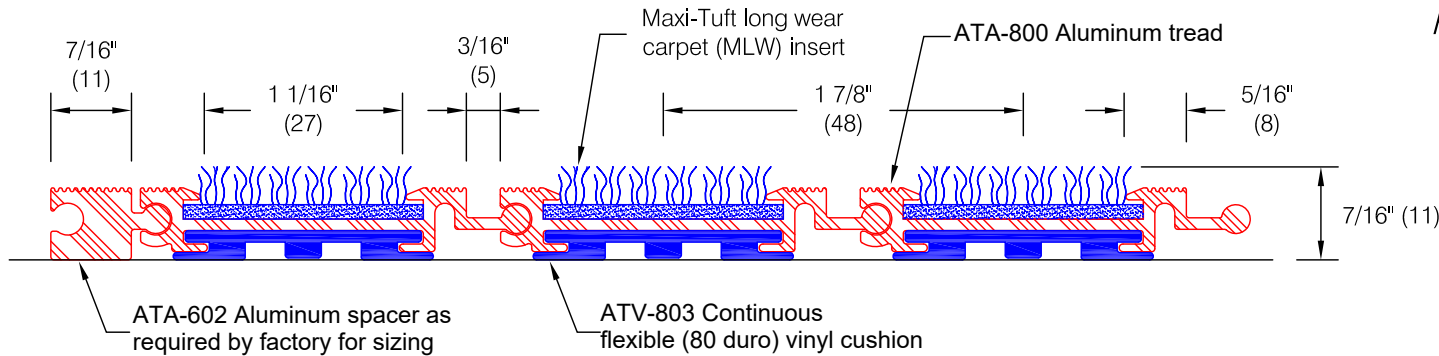

Features:




- Extruded aluminum treads alloy 6063-T52
- Continuous vinyl cushion for superior noise reduction
- Roll-Up for easy cleaning of recess
- Optional perforated hinge for added drainage
- Single section width to 144" (3658)
- Space dyed, 100% polyamide nylon, tetra-lobal fibers, 5/32 (4) pile height, 30 oz/sq yd
- Static Coefficient of Friction (ASTM D-2047-82)
Dry: 0.49, Wet: 0.77

Finishes:



- Aluminum tread and spacer:
Mill finish (standard) #405
Medium bronze anodized #404
Clear anodized #403
Black anodized #462
- Vinyl cushion: Black
- Maxi-Tuft long wear carpet insert:
Manufacturer's standard colors

Optional Framing:


* **Amarco Products** requires that exact opening dimensions be provided. Factory will fabricate mats 1/4" (6) smaller than exact opening dimensions to allow for proper fit on dimensions without nosing.

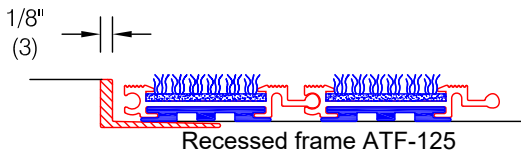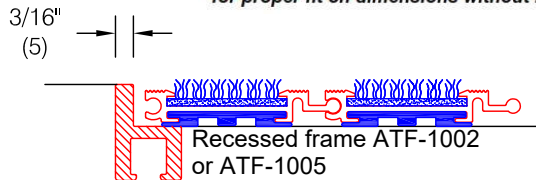


Hinge Details:



Optional Nosings:



Sectioning information:

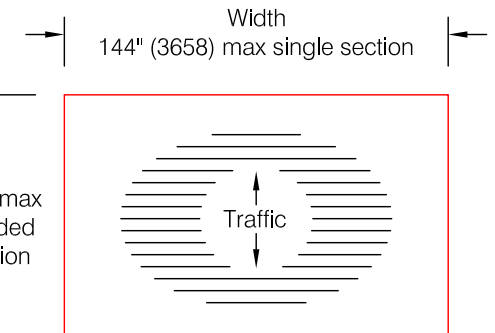


* **Mats over 66 square feet may require sectioning as determined by the factory**

Amarco Products reserves the right to discontinue a design or modify an existing design without prior notice




| | | |
|-------------|-------------|--|
| Customer : | Project : | |
| Architect : | Sales Rep : | |

AT-800 - 7/16" Aluminum Recess Mat w/ Rigid Corrugated Vinyl Insert


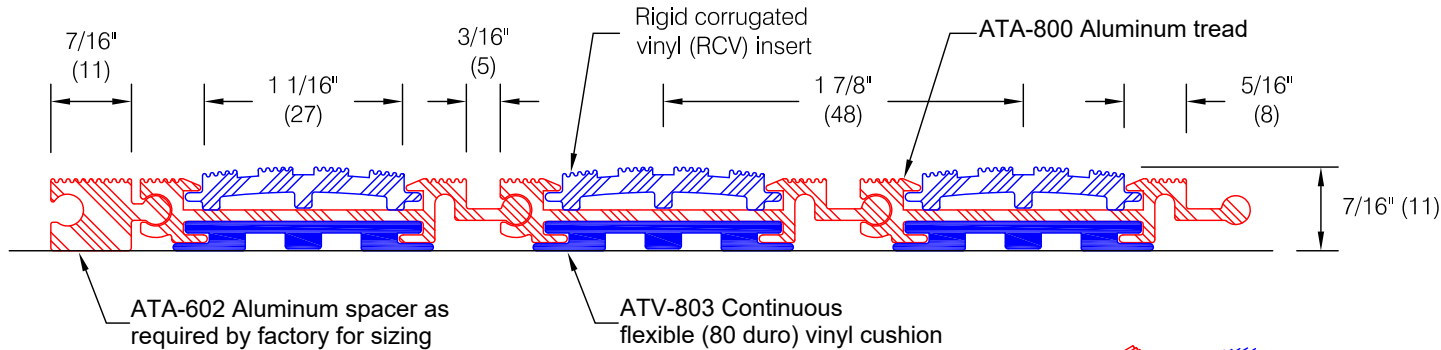


Optional Framing:


* Amarco Products requires that exact opening dimensions be provided. Factory will fabricate mats 1/4" (6) smaller than exact opening dimensions to allow for proper fit on dimensions without nosing.

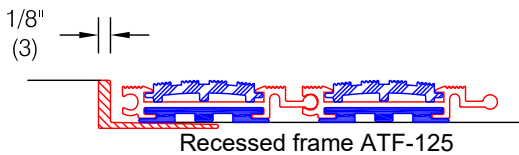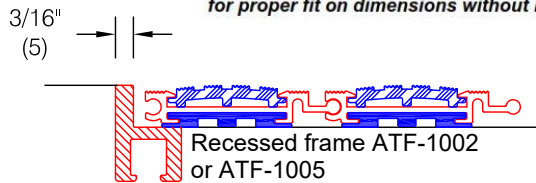

Hinge Details:

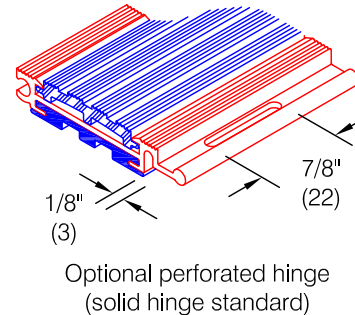

Optional Nosings:




Features:

- Extruded aluminum treads alloy 6063-T52
- Continuous vinyl cushion for superior noise reduction
- Roll-Up for easy cleaning of recess
- Optional perforated hinge for added drainage
- Single section width to 144" (3658)
- Rigid corrugated vinyl insert (colorable)

Finishes:

- Aluminum tread and spacer:
 - Mill finish (standard) #405
 - Medium bronze anodized #404
 - Clear anodized #403
 - Black anodized #462
- Vinyl cushion: Black
- Rigid corrugated vinyl insert:
 - Manufacturer's standard colors

Sectioning information:

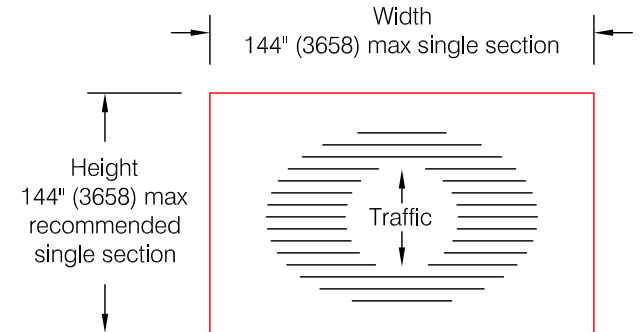


* Mats over 66 square feet may require sectioning as determined by the factory

Amarco Products reserves the right to discontinue a design or modify an existing design without prior notice




| | | |
|-------------|-------------|--|
| Customer : | Project : | |
| Architect : | Sales Rep : | |

AT-800 - 7/16" Aluminum Recess Mat w/ Nylon Carpet insert


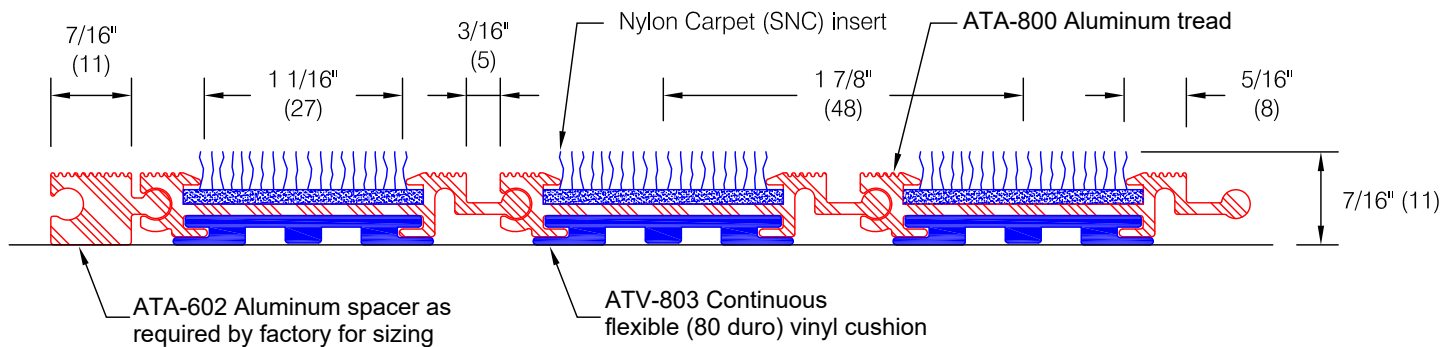


Optional Framing:

* Amarco Products requires that exact opening dimensions be provided. Factory will fabricate mats 1/4" (6) smaller than exact opening dimensions to allow for proper fit on dimensions without nosing.

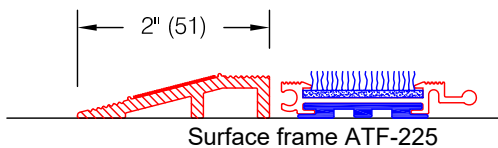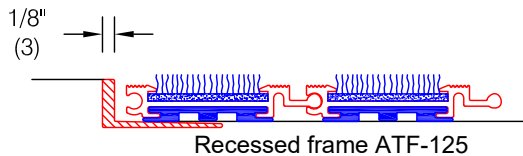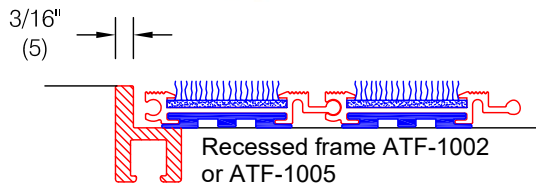

Hinge Details:



Optional Nosings:




Features:

- Extruded aluminum treads alloy 6063-T52
- Continuous vinyl cushion for superior noise reduction
- Roll-Up for easy cleaning of recess
- Optional perforated hinge for added drainage
- Single section width to 144" (3658)
- 100% solution dyed nylon fiber with 1/4" (6) finish pile height, 33.8 oz/sq yd in rigid backing
- Static Coefficient of Friction (ASTM D-2047-82)
Dry: 0.48, Wet: 0.67

Finishes:

- Aluminum tread and spacer:
Mill finish (standard) #405
Medium bronze anodized #404
Clear anodized #403
Black anodized #462
- Vinyl cushion: Black
- Rigid-Back Nylon carpet insert:
Manufacturer's standard colors

Sectioning information:

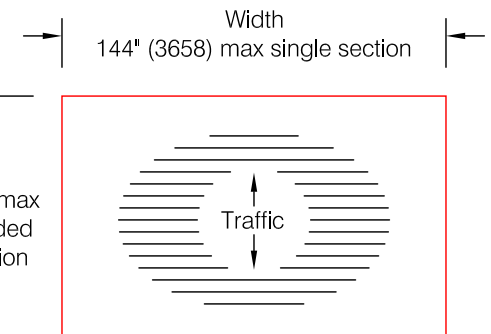

* Mats over 66 square feet may require sectioning as determined by the factory

Amarco Products reserves the right to discontinue a design or modify an existing design without prior notice

| | | |
|-------------|-------------|--|
| Customer : | Project : | |
| Architect : | Sales Rep : | |